

### Introduction

The Oregon Department of Geology and Mineral Industries (DOGAMI) has been identifying and mapping the tsunami inundation hazard along the Oregon coast since 1994. In Oregon, DOGAMI manages the National Tsunami Hazard Mitigation Program, which has been administered by the National Oceanic and Atmospheric Administration (NOAA) since 1995. DOGAMI's work is designed to help cities, counties, and other sites in coastal areas reduce the potential for disastrous, human-related consequences by understanding and mitigating this geologic hazard. Using federal funding awarded by NOAA, DOGAMI has developed a new generation of tsunami inundation maps to help residents and visitors along the entire Oregon coast prepare for the next Cascadia Subduction Zone (CSZ) earthquake and tsunami.

Oregon, DOGAMI has also incorporated physical evidence that suggests that portions of the coast may drop 4 to 10 feet during the earthquake; this effect is known as subsidence. Detailed information on fault geometries, subsidence computer models, and the methodology used to create the tsunami scenarios presented on this map can be found in DOGAMI Special Papers 41 (Pried and others, 2009) and 43 (Witter and others, 2011).

### Map Explanation









This tsunami inundation map displays the output of computer models representing five selected tsunami scenarios, all of which include the earthquake produced subsidence and the tsunami amplifying effects of the splay fault. Each scenario assumes that a tsunami occurs at Mean Higher High Water (MHHW) tide; MHHW is defined as the average height of the higher high tides observed over an 18-year period at the Astoria tide gauge (NOAA Station 9450400). To make it easier to understand this scientific material and to enhance the educational aspects of hazard mitigation and response, the five scenarios are labeled as "T" (tsunami) sizes ranging from Small, Medium, Large, Extra Large, to Extra Extra Large (S, M, L, XL, XXL). The map legend depicts the respective amounts of slip, the frequency of occurrence, and the earthquake magnitudes for these five scenarios. Figure 4 shows the cumulative number of buildings inundated within the megaregion.

The computer simulation model output is provided to DOGAMI as millions of points with values that indicate whether the location of each point is wet or dry. These points are converted to wet and dry contour lines that form the extent of inundation. The transition area between the wet and dry contour lines is termed the Wet/Dry Zone, which represents the amount of error in the model when determining the maximum inundation for each scenario. Only the XXL Wet/Dry Zone is shown on this map.

This map also shows the regulatory tsunami inundation line (Oregon Revised Statutes 455-446 and 455-447), commonly known as the Senate Bill 379 line. Senate Bill 379 (SB 379) instructed DOGAMI to establish the area of expected tsunami inundation based on scientific evidence and tsunami modeling in order to prohibit the construction of new essential and special occupancy structures in this tsunami inundation zone (Pried, 1995).

**CSZ Frequency:** Comprehensive research of the offshore geologic record indicates that at least 19 major ruptures of the full length of the CSZ have occurred off the Oregon coast over the past 10,000 years (Figure 3). All 19 of these full-length CSZ events were likely magnitude 9 to 9.2 earthquakes (Witter and others, 2011). The most recent CSZ event happened approximately 300 years ago on January 26, 1700. Sand deposits carried onshore and left by the 1700 event have been found 12 miles inland; older tsunami deposits have also been discovered in estuaries 6 miles inland. As shown in Figure 3, the range in time between these 19 events varies from 110 to 1,150 years, with a median time interval of 490 years. In 2006 the United States Geological Survey (USGS) released the results of a study announcing that the probability of a magnitude 9+ CSZ earthquake occurring over the next 30 years is 10%, and that such earthquakes occur about every 500 years (WGCEP, 2006).

**CSZ Model Specifications:** The sizes of the earthquake and its resultant tsunami are primarily given by the amount and geometry of the slip that takes place when the North American Plate slips westward over the Juan de Fuca Plate during a CSZ event. DOGAMI has modeled a wide range of earthquake and tsunami sizes that take into account different fault geometries that could amplify the amount of seawater displacement and increase tsunami inundation. Seismic geophysical profiles show that there may be a steep splay fault running nearly parallel to the CSZ but closer to the Oregon coastline (Figure 1). The effect of this splay fault moving during a full-length CSZ event would be an increase in the amount of vertical displacement of the Pacific Ocean, resulting in an increase of the tsunami inundation extent in

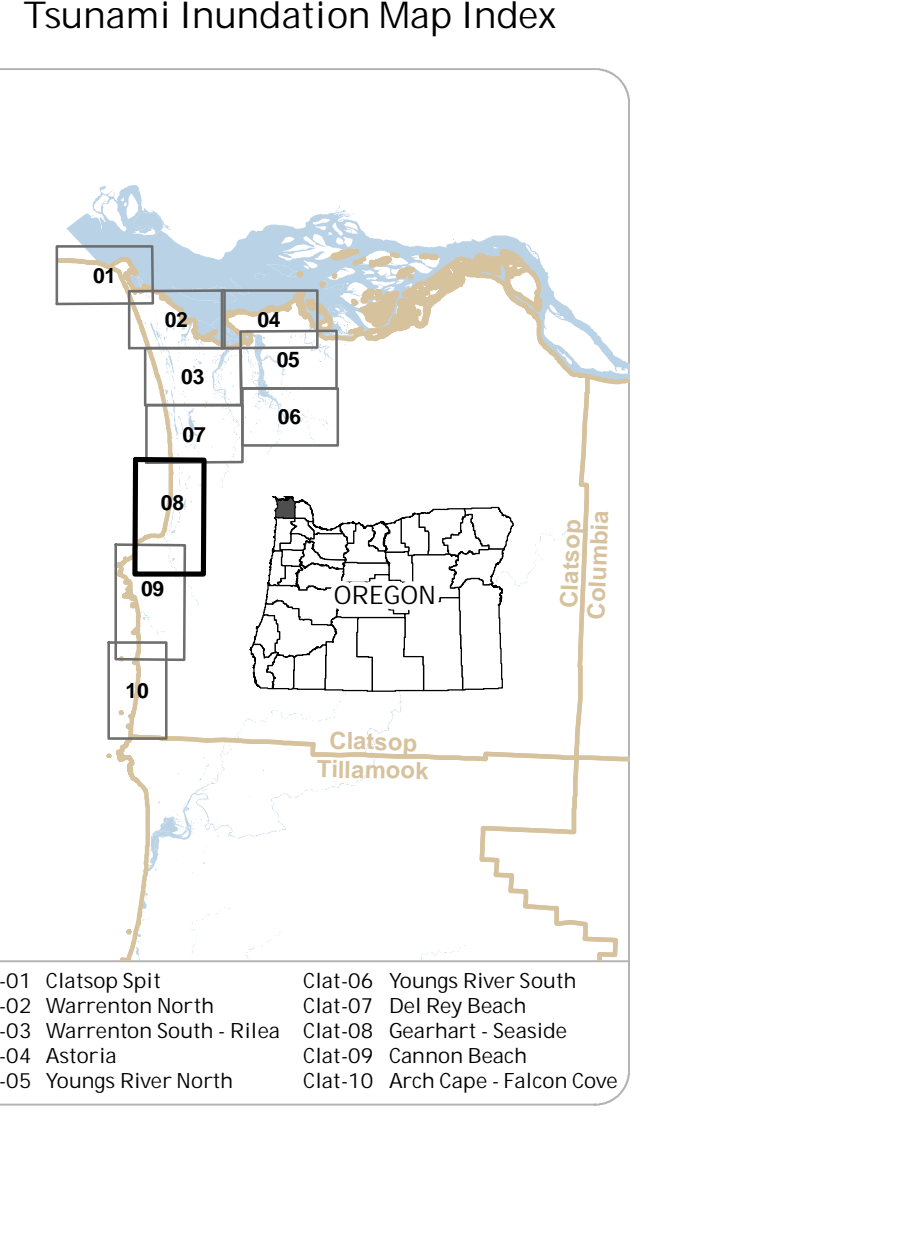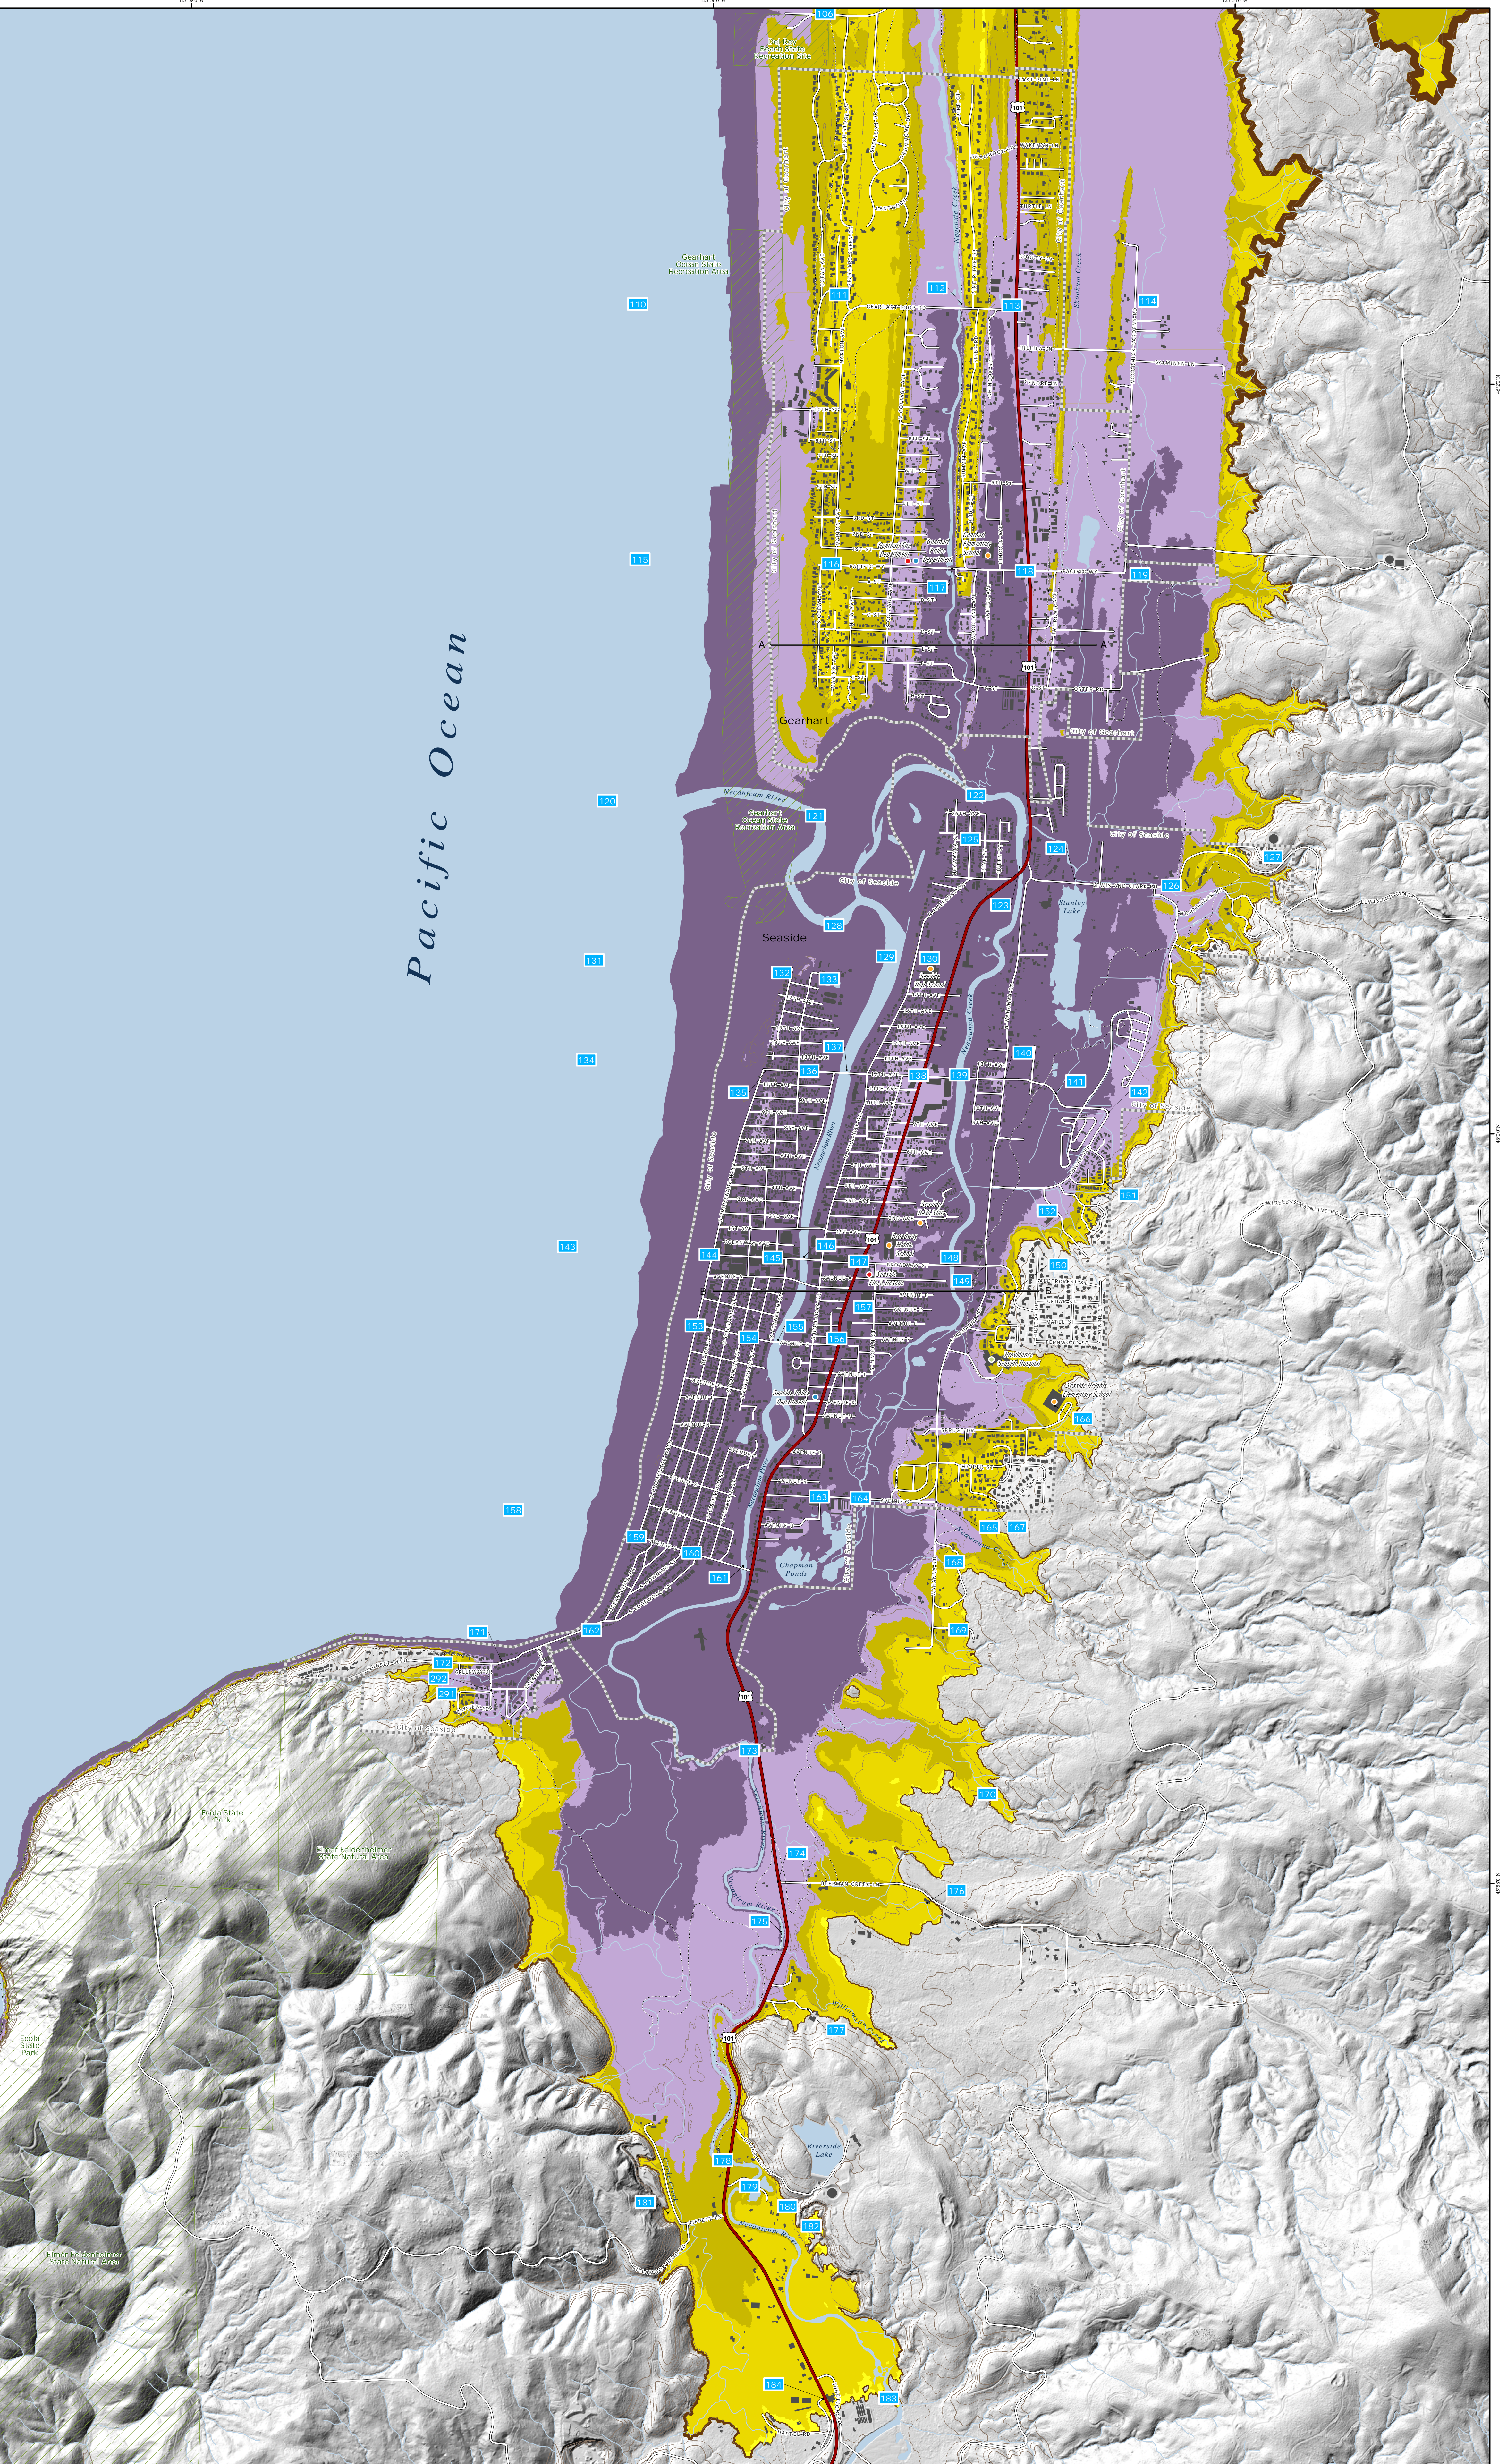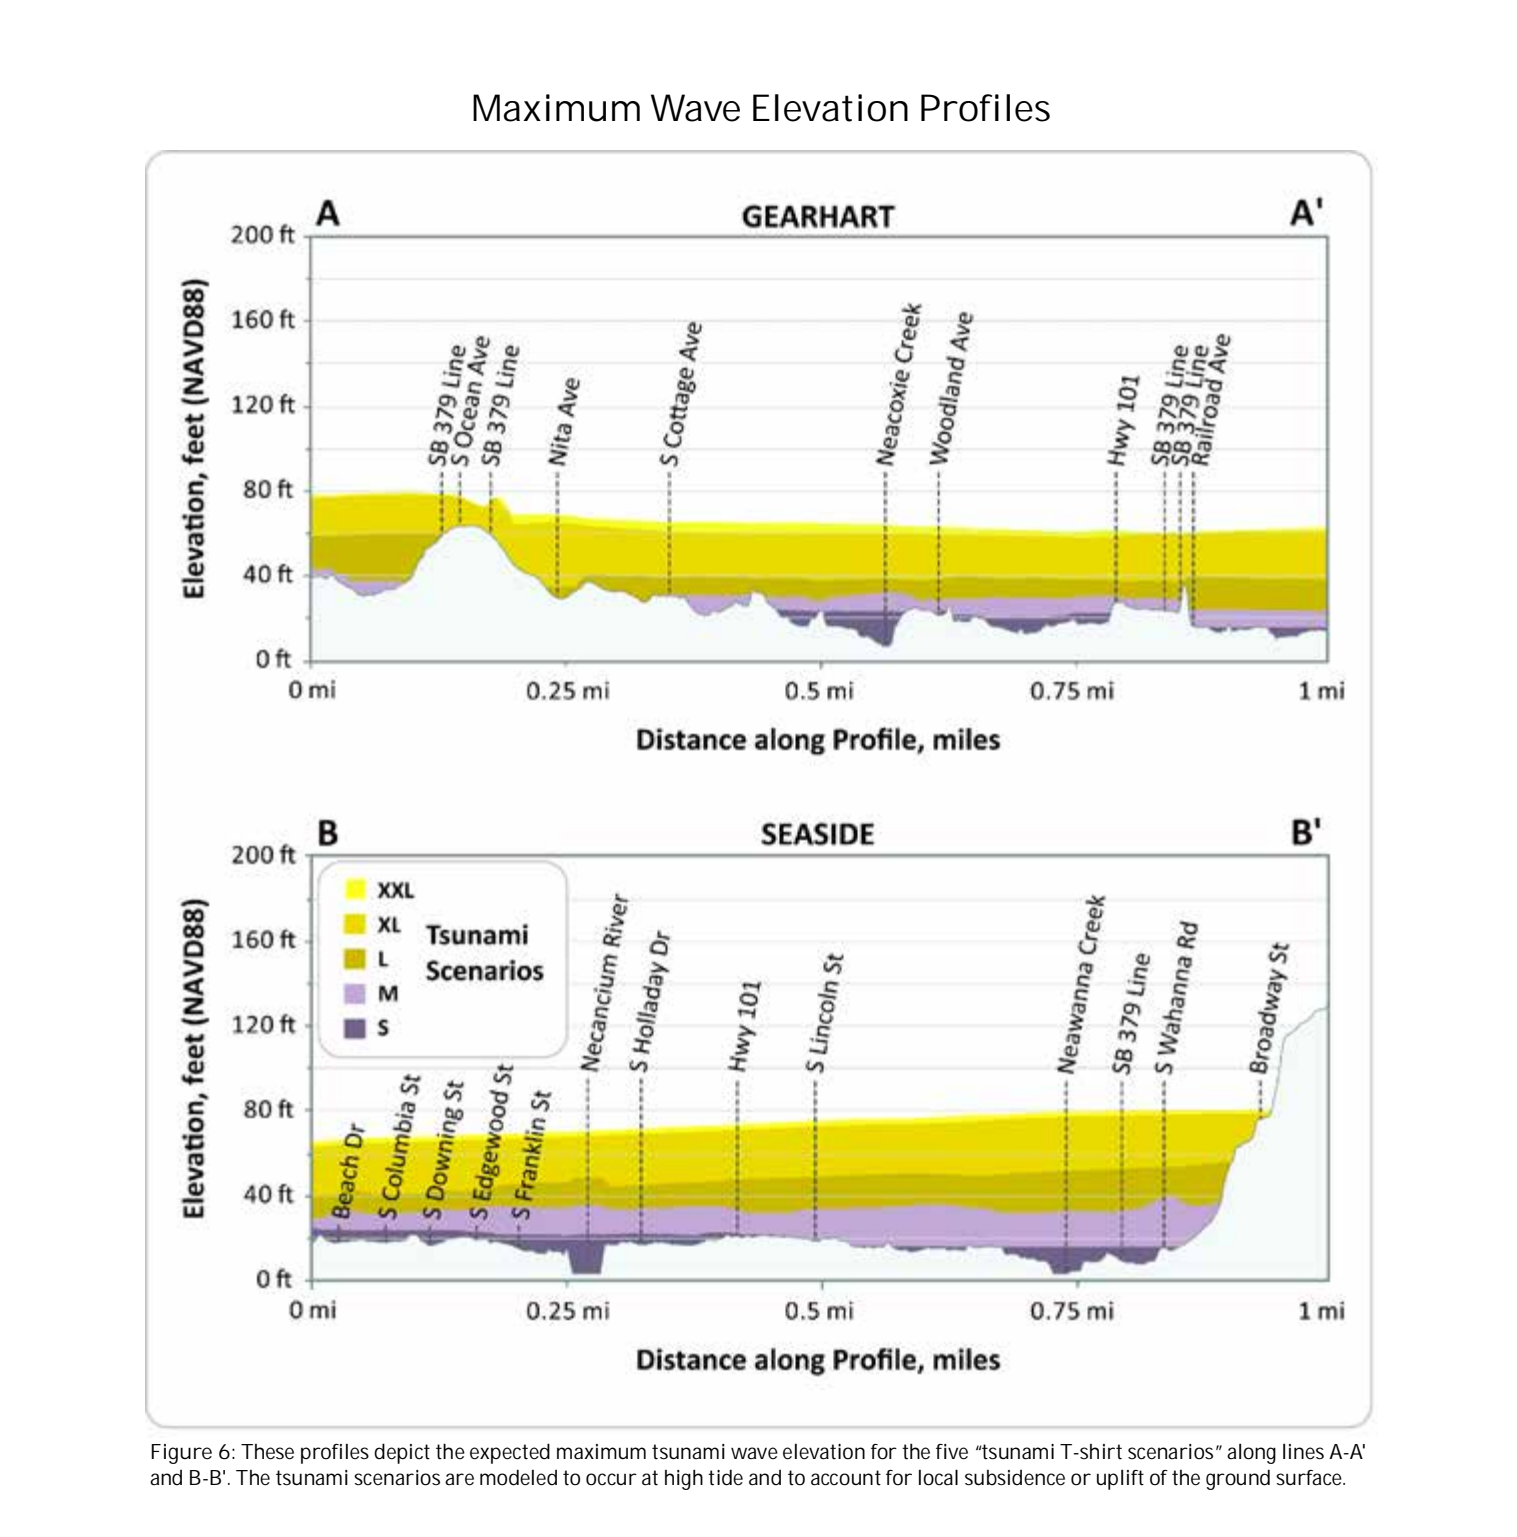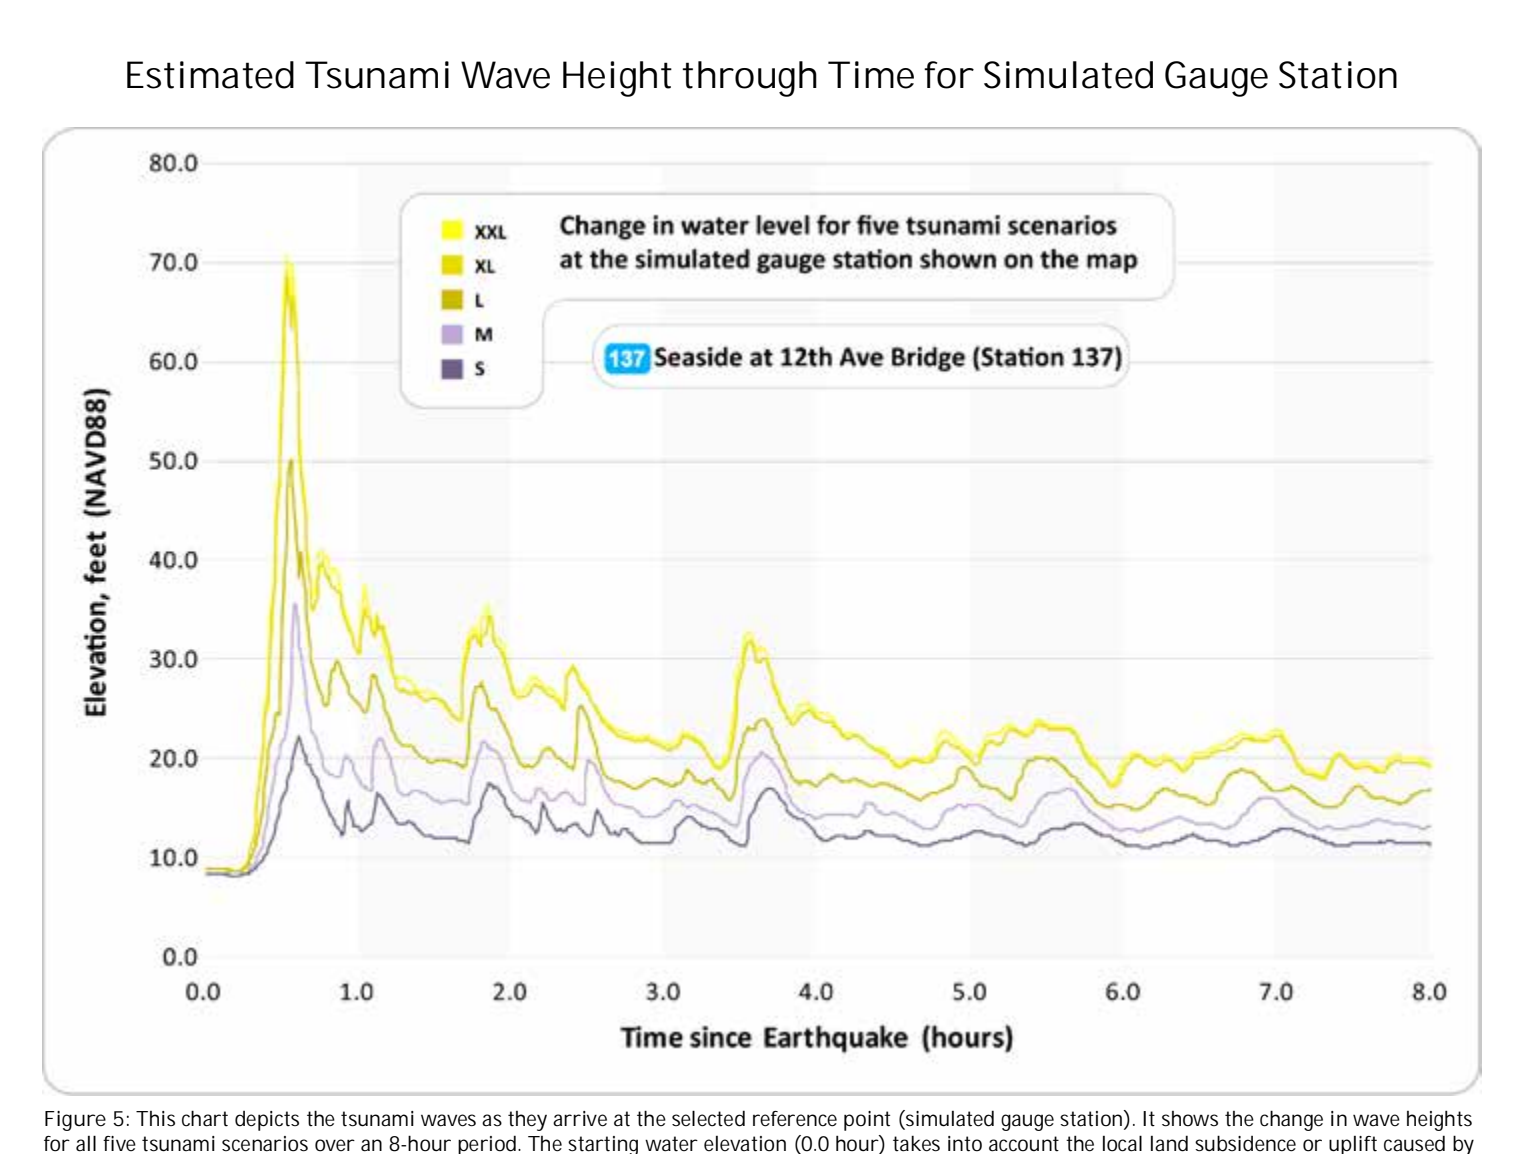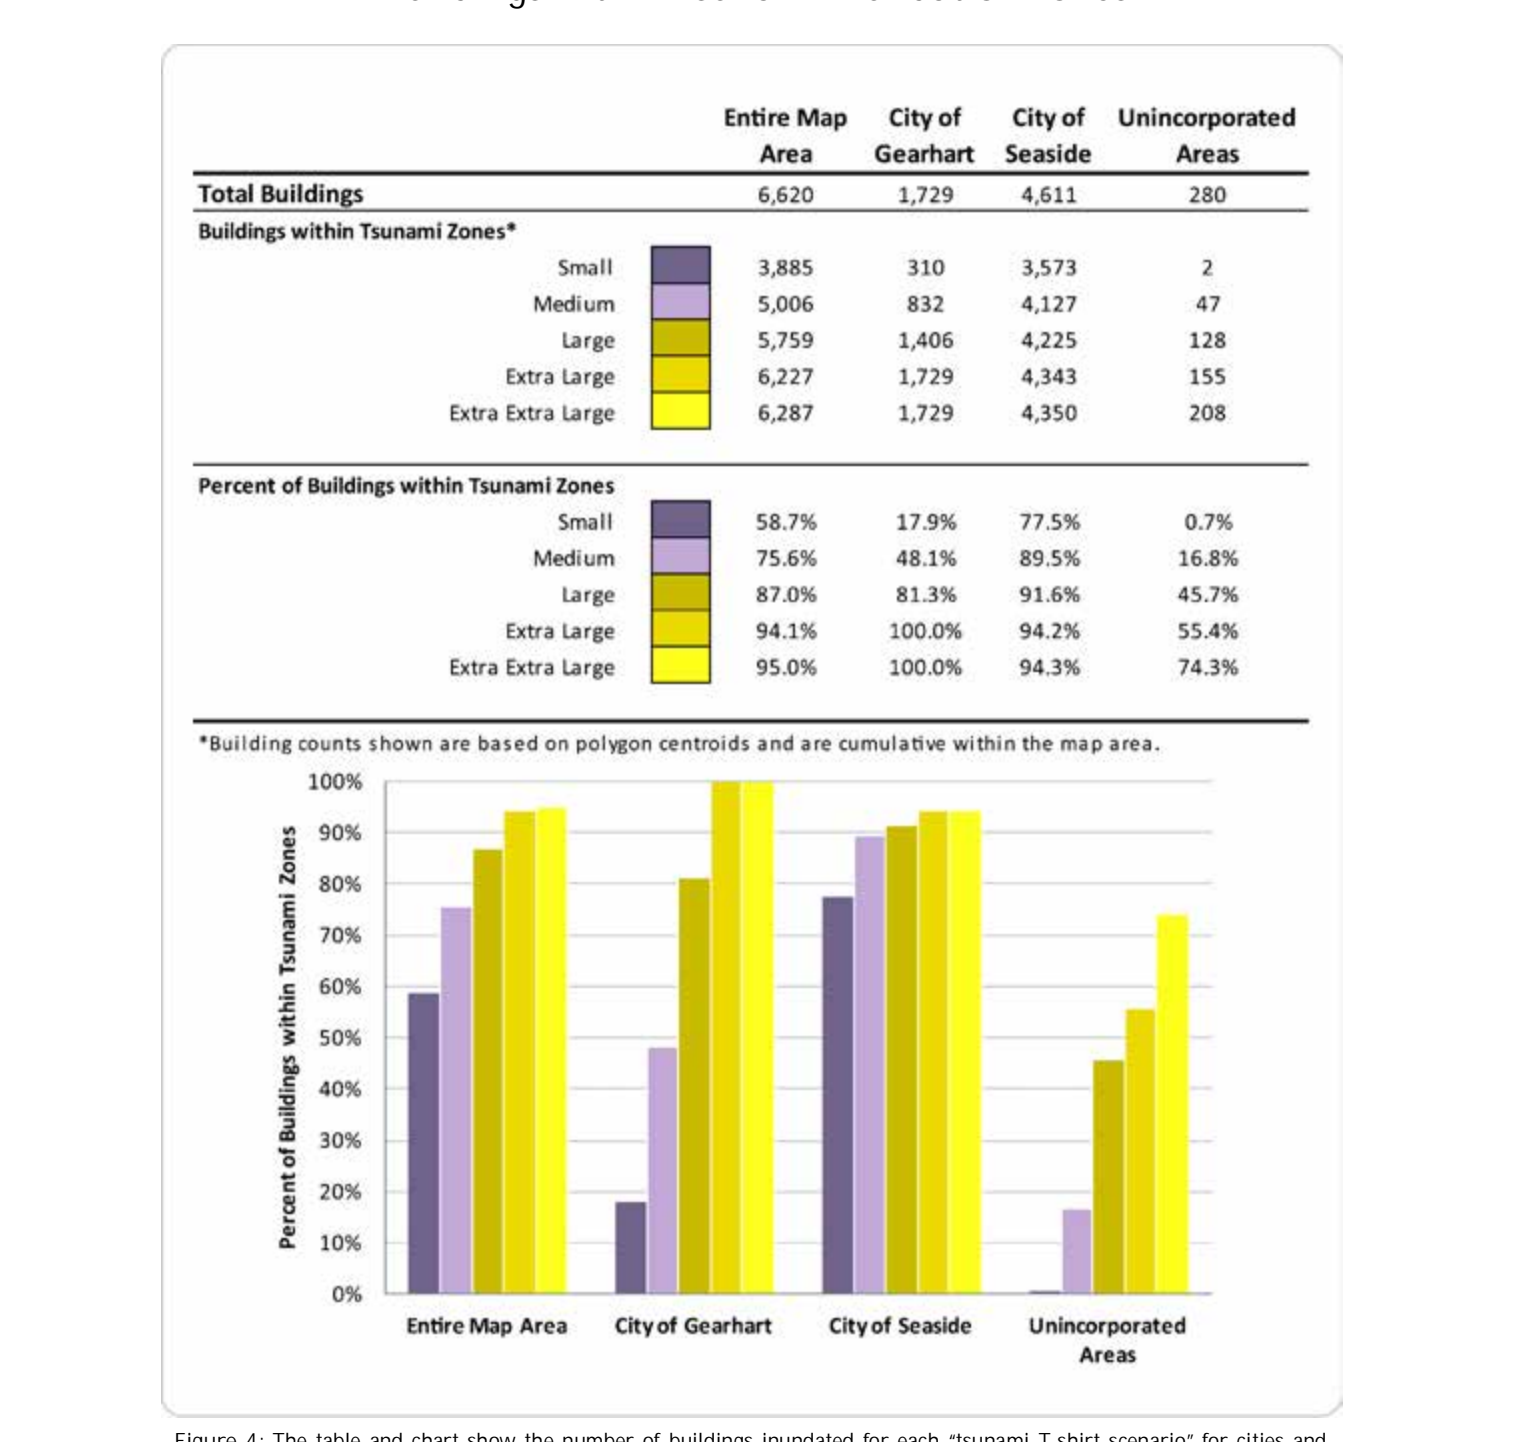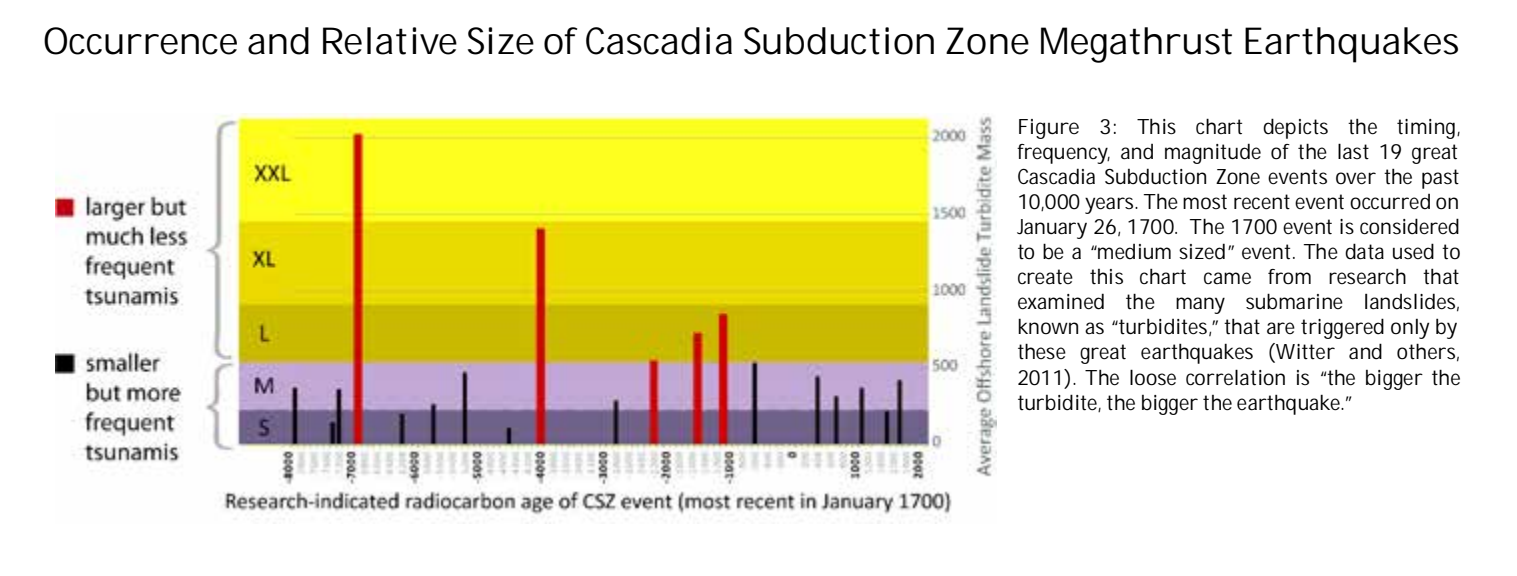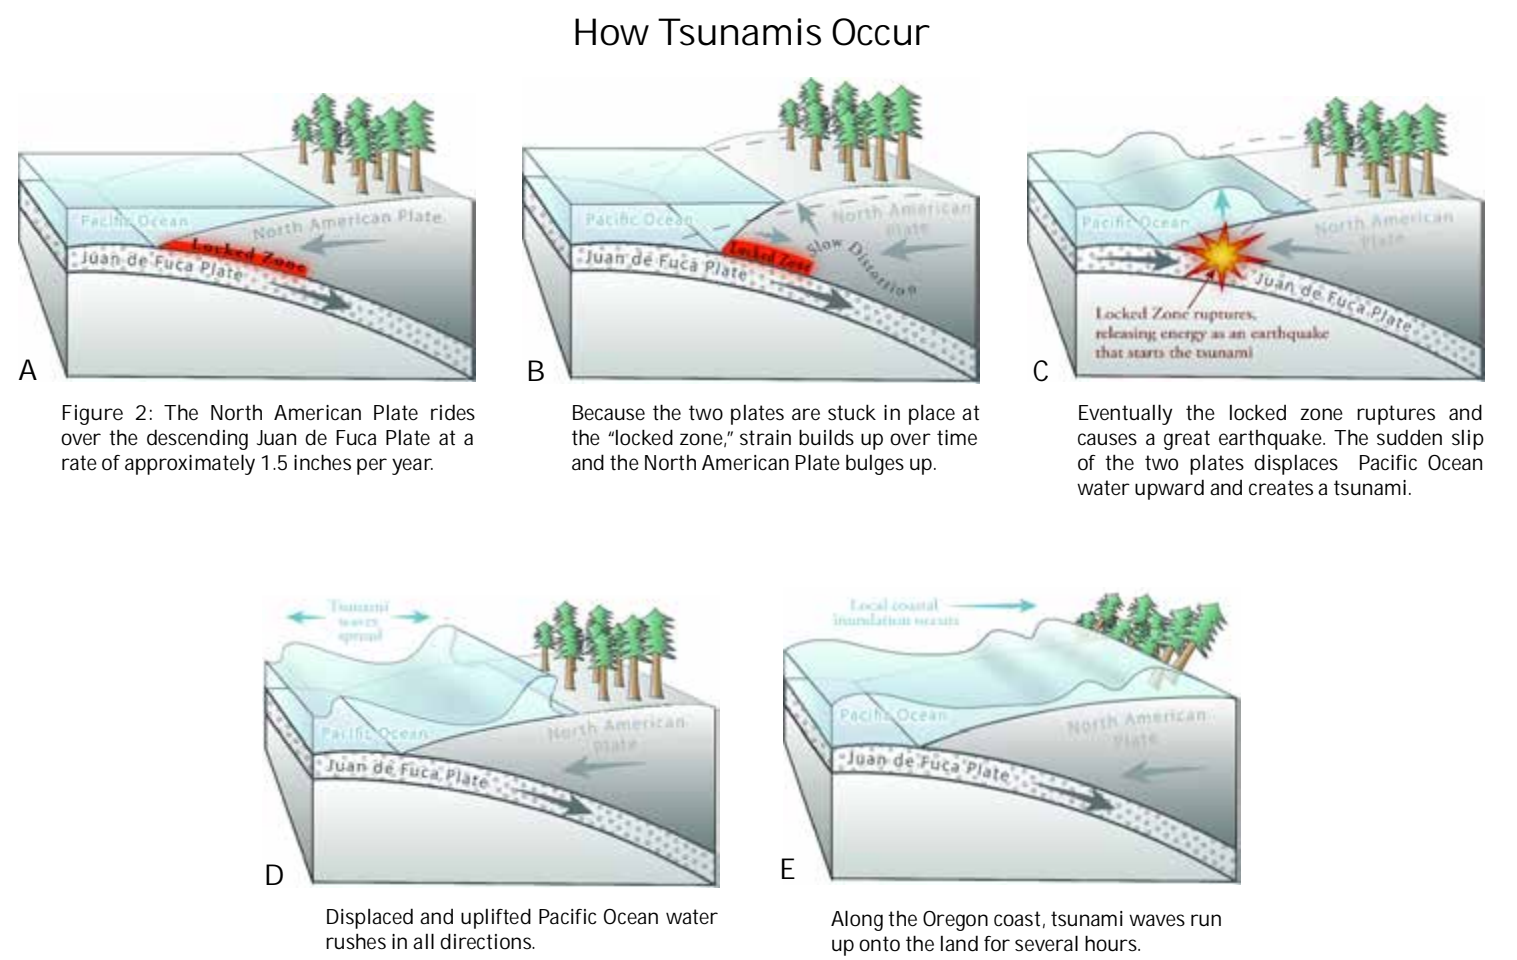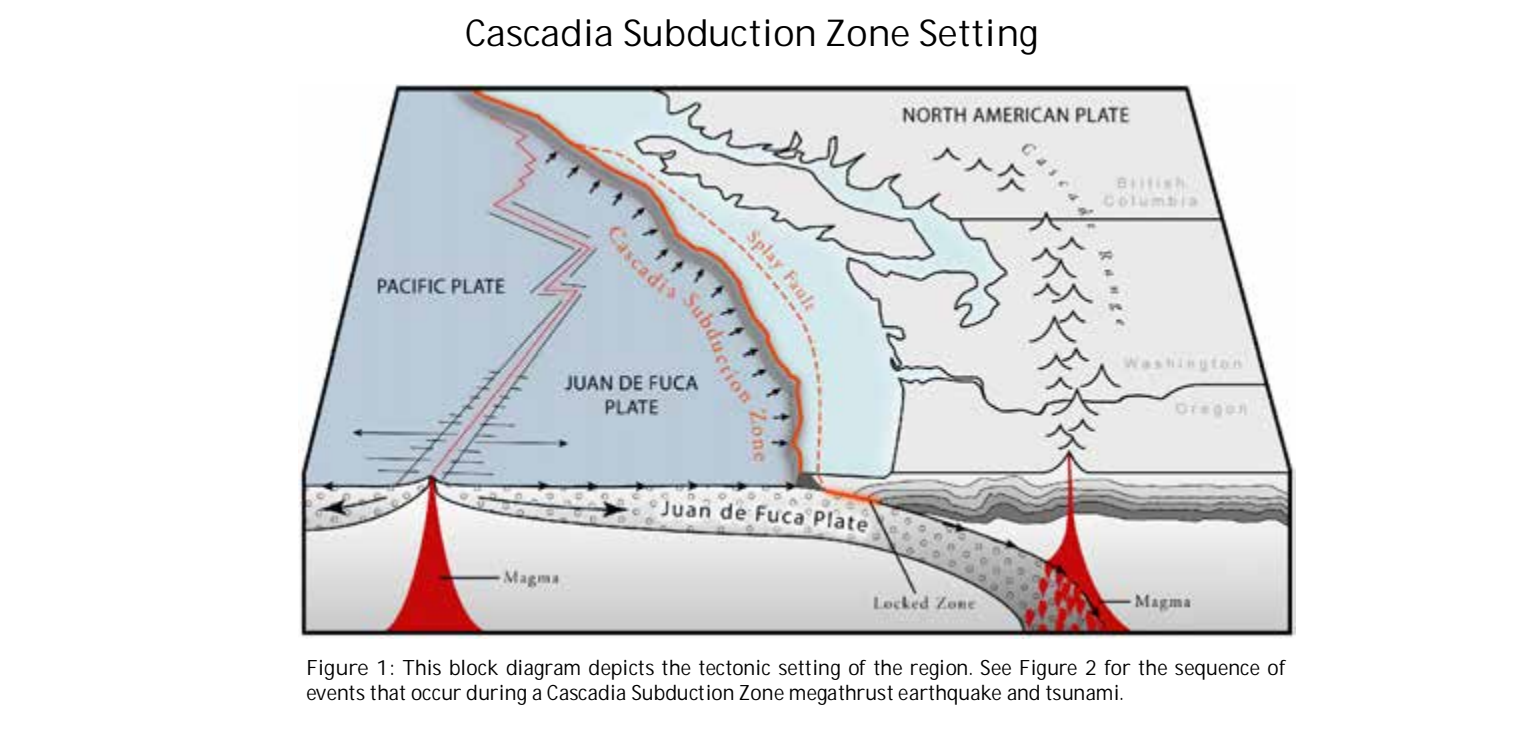

**Data References**  
Source Data: This map is based on hydrodynamic tsunami modeling by Joseph Zhang, Oregon Health and Science University Portland, Oregon. Model data were created by John T. English and George R. Pried, Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon. Hydrology data, contours, critical facilities, and building footprints were created by DOGAMI. Senate Bill 379 line data were digitized by Rachel L. Smith and Scott E. Prieder, DOGAMI, in 2011 (GIS file, not shown). Urban growth boundaries (2011) were provided by the Oregon Department of Land Conservation and Development (DLCD). Transportation data (2011) provided by Clatsop County were edited by DOGAMI to improve the spatial accuracy of the features and to add newly constructed roads not present in the original data type. LiDAR data are from Clatsop County Laser Data Acquisition (2011-48123-18) - Hillbrook Head and (2011-48123-28) - Gearhart.

**Coordinate System:** Oregon Statewide Lambert Conformal Conic, Unit: International Feet, Horizontal Datum: NAD 1983 datum, Vertical Datum: MVD 1988. Graticule shown with geographic coordinates (latitude/longitude).

**References:**  
Pried, G.R., 1995. Evaluation of mapping methods and use of the tsunami hazard maps of the Oregon coast. Oregon Department of Geology and Mineral Industries (DOGAMI), Portland, Oregon. (http://pubs.opm.gov/2007/41437/)  
Pried, G.R., Goldfinger, C., Wang, K., Witter, R.C., Zhang, Y., and Scaletta, A.M., 2009. Tsunami hazard assessment of the northern Oregon coast: a multi-disciplinary approach based at Cannon Beach. Clatsop County, Oregon: Oregon Department of Geology and Mineral Industries Special Paper 41, 11 p.  
Witter, R.C., Zhang, Y., Wang, K., Pried, G.R., Goldfinger, C., Simley, L.L., English, T.L., and Form, P.A., 2011. Simulating tsunami inundation at Cannon Beach, Oregon using hydrodynamic models and Alaska bathymetry. Oregon Department of Geology and Mineral Industries Special Paper 43, 57 p.

**Software:** ArcGIS 10.1, Microsoft® Excel®, and Adobe® Illustrator®.

**Funding:** This map was funded under award #H40NAN06267014 by the National Oceanic and Atmospheric Administration (NOAA) through the National Tsunami Hazard Mitigation Program.

**Map Data Creation/Development:** Joseph Zhang, Oregon Health and Science University, Portland, Oregon; Rachel L. Smith, Oregon Department of Geology and Mineral Industries, Salem, Oregon; John T. English, Oregon Department of Geology and Mineral Industries, Portland, Oregon; Scott E. Prieder, Oregon Department of Geology and Mineral Industries, Portland, Oregon.

**Map Production:** Clatsop County, Oregon: L.B. Hughes, Scott E. Prieder, Taylor E. Witter, Alan Dorn, M.T. Lewis, Rachel L. Smith, Alexander Dorn, A. Schaefer, and Alan Dorn. Date: Oct 11, 2013.

**Nature of the Northwest**  
For more information contact:  
Nate G. Heston, Information Center  
800 NE Oregon Street, 6th, Ste. 965  
Portland, Oregon 97232  
Telephone: (503) 825-2222  
Web: www.natureofnw.org