


Machine Safeguarding *at the* Point of Operation

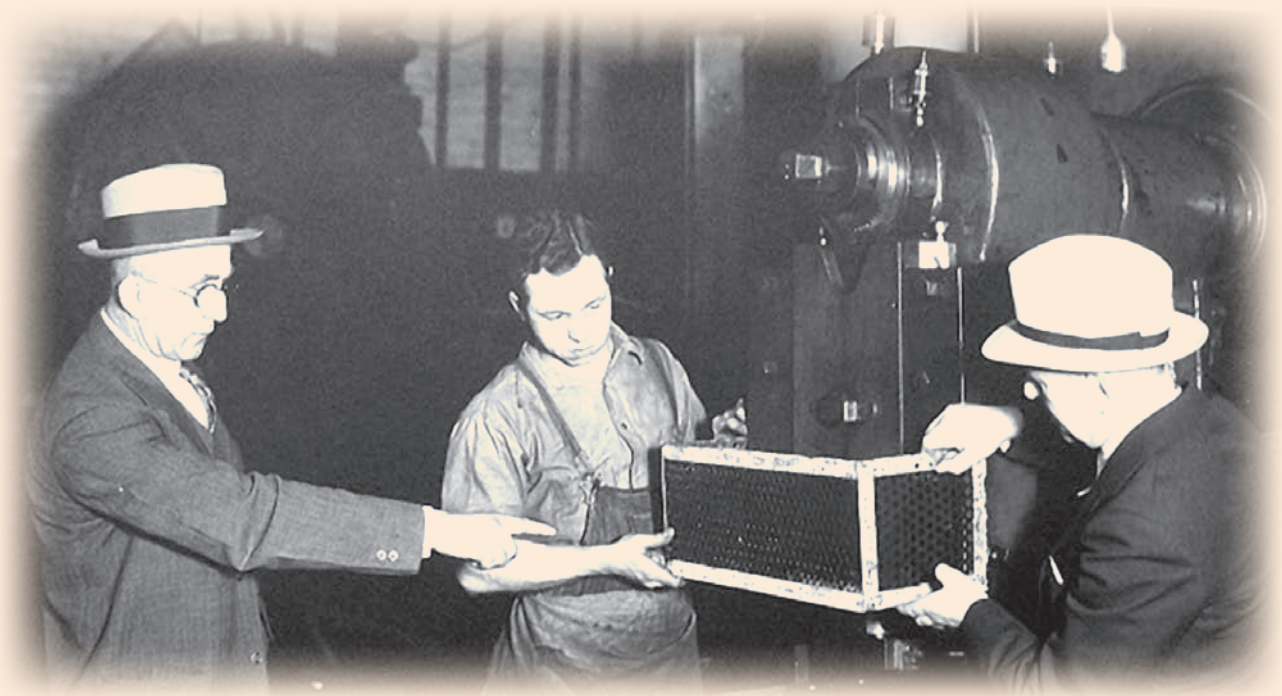

*A Guide for Finding Solutions
to Machine Hazards*

About this document —


Machine Safeguarding at the Point of Operation is an Oregon OSHA Standards and Technical Resources publication written and compiled by Craig Hamelund. Thanks to Ellis Brasch, Mike Lulay, and Mike Mitchell for advice and technical assistance.

Thanks to the following individuals for crafting the final document:

Layout and design: Patricia Young, Oregon OSHA

Editing and proofing: Mark Peterson, DCBS Communications

Questions and comments: We'd like to hear from you. Contact Craig Hamelund, Oregon OSHA Portland Field Office, Public Education, 503-229-5910, e-mail craig.hamelund@state.or.us.

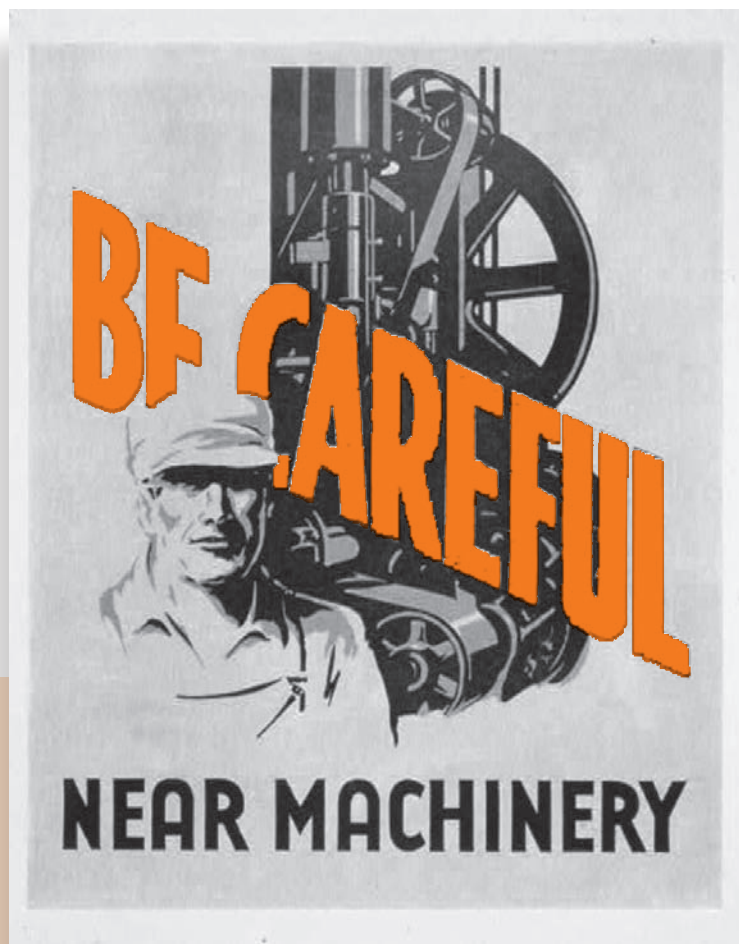

Above: *Be Careful Near Machinery* poster, created by Robert Lachenmann (1936) for the Federal Art Project.
Source: Library of Congress: *Prints and Photographs Online Catalogue*.

On the cover: Source: Wisconsin Department of Workforce Development.

Table of Contents




Table of Contents

Introduction	5
The importance of machine safeguarding	6
Machine safeguarding	9
Abrasive wheel grinder	10
Band saw	13
Horizontal band saw	14
Vertical band saw	15
CNC turning machine	16
Compacting and baling equipment	18
Cut-off saws	20
Drill press	22
Ironworker	23
Jointer	24
Lathe	25
Metal lathe	26
Wood lathe	28
Milling machine	31
Planer	32
Portable tools	33
Abrasive grinder	34
Belt sander	35
Circular saw	36
Jigsaw	38

Table of Contents

Power press	39
Power press brake	44
Power roll forming and bending machine	48
Radial-arm saw	50
Sander	51
Belt sander	52
Disk sander	53
Scroll (jig) saw	55
Shaper/router	56
Shear	58
Table saw	60

Additional References

Guarding power-transmission apparatuses	63
Lockout/tagout	64
Risk-reduction hierarchy	65
Training guidelines	66
Basic safety principles	67
Glossary of selected terms	68
Oregon OSHA Services	inside back cover

Introduction

The importance of machine safeguarding

Most of us have heard the old adage about how machinery doesn't discriminate between product and people — it'll do the same to both. Many people discover this through unfortunate means: an injured machine operator sharing the details of his or her accident or a family member reflecting on the circumstances that took a loved one.

Recent statistics that support the concern

National

Contact with objects and equipment

(caught in, on, or under equipment or machinery only)

- 358 fatalities per year
- 57,000 injuries per year

Oregon

Contact with objects and equipment

(caught in, on, or under equipment or machinery only)

- 7 compensable fatalities per year
- 13.5 percent of all fatalities
- 965 accepted disabling injuries

Machines that have moving parts and workers who operate them have an uneasy relationship. Machines make workers more productive and enable them to form and shape material in ways that would be impossible with hand tools. Technology can make machines safer, but as long as workers need machines to help them process material — to cut, shear, punch, bend, or drill — they'll be exposed to moving parts that could harm them. Much of the danger occurs at the point of operation, where the work is performed and where the machine cuts, shears, punches, bends, or drills.

Recent Oregon fatalities

- Operator pulled into a machine by a moving belt
- Worker caught in an irrigation spool
- Lathe operator hit by rotating bar stock
- Operator caught in keyed shaft (loose-fitting shirt contributed)
- Worker caught in a glue line conveyor

About this guide

This guide focuses on point-of-operation hazards and safeguarding methods. It does not specifically address hazards outside the point of operation or guarding power-transmission devices. However, the Reference section does address typical hazards and guarding solutions for power-transmission devices and general safety principles for operating or maintaining machines and equipment.

This guide offers a comprehensive look at equipment and machinery found in many Oregon workplaces and specifies most of Oregon OSHA's current machine-guarding requirements. Although it recommends specific point-of-operation safeguarding methods for many different machines, it does not specify all machine-guarding requirements, nor does it address all types of machinery and equipment. See the list of Oregon OSHA standards related to machinery and machine guarding on the next page.

This guide also refers to many American National Standards. The American National Standards Institute (ANSI) publishes voluntary consensus standards on the care and use of machinery. ANSI standards provide guidance for complying with Oregon OSHA standards. ANSI standards are sometimes incorporated into Oregon OSHA regulations and employers are accountable for complying with the version specified. Oregon OSHA generally recommends, however, that employers follow the most recent ANSI standards.

Oregon OSHA standards related to machinery and machine guarding

General Industry

- Division 2/Subdivision I *Personal Protective Equipment*
- Division 2/Subdivision J *General Environmental Controls (Lockout/Tagout)*
- Division 2/Subdivision N *Material Handling and Storage*
- Division 2/Subdivision O *Machinery and Machine Guarding*
- Division 2/Subdivision P *Hand and Portable Powered Tools*
- Division 2/Subdivision R *Special Industries (sawmills, pulp and paper mills, etc.)*

Construction

- Division 3/Subdivision E *Personal Protective and Life Saving Equipment*
- Division 3/Subdivision I *Tools — Hand and Power*

Agriculture

- Division 4/Subdivision I *Protective Equipment*
- Division 4/Subdivision J *Work Environment (Lockout/Tagout)*
- Division 4/Subdivision N *Material Handling*
- Division 4/Subdivision O *Equipment Guarding*
- Division 4/Subdivision P *Small Tools*

Forest Activities


- Division 7/Subdivision D *Personal Protective Equipment and Programs*
- Division 7/Subdivision H *Machines Used in Forest Activities*

Machine safeguarding

Abrasive wheel grinder

Abrasive wheels and grinding machines come in many styles, sizes, and designs. Both bench-style and pedestal (stand) grinders are commonly found in many industries. These grinders often have either two abrasive wheels, or one abrasive wheel and one special-purpose wheel such as a wire brush, buffing wheel, or sandstone wheel.

These types of grinders normally come with the manufacturer's safety guard covering most of the wheel, including the spindle end, nut, and flange projection. These guards must be strong enough to withstand the effects of a bursting wheel. In addition, a tool/work rest and transparent shields are often provided.

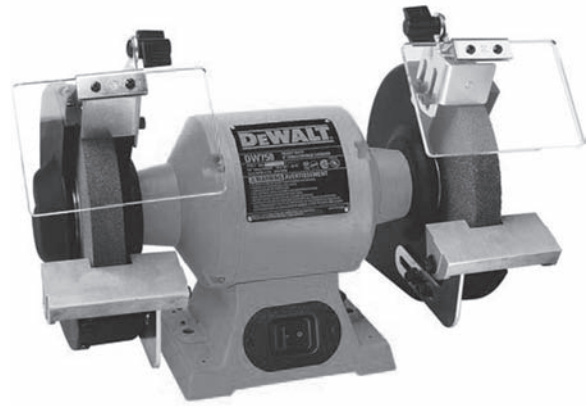


DEWALT Industrial Tool Co.

Hazard

Bench-style and pedestal grinders create special safety problems due to the potential of the abrasive wheel shattering; exposed rotating wheel, flange, and spindle end; and a naturally occurring nip point that is created by the tool/work rest. This is in addition to such concerns as flying fragments, sparks, air contaminants, etc. Cutting, polishing, and wire buffing wheels can create many of the same hazards.


Grinding machines are powerful and are designed to operate at very high speeds. If a grinding wheel shatters while in use, the fragments can travel at more than 300 miles per hour. In addition, the wheels found on these machines (abrasive, polishing, wire, etc.) often rotate at several thousand rpms. The potential for serious injury from shooting fragments and the rotating wheel assemblies (including the flange, spindle end, and nut) is great. To ensure that grinding wheels are safely used in your workplace, know the hazards and how to control them.

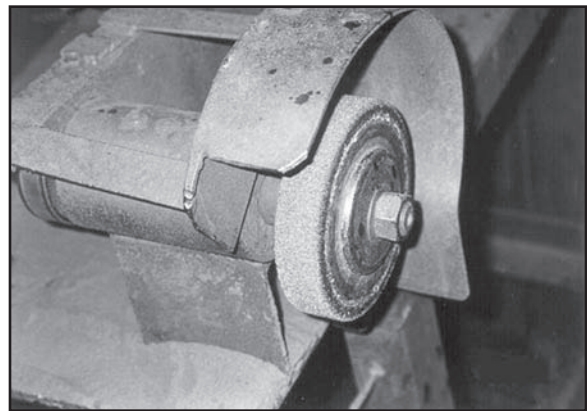

Exposed spindle end, flange, and nut.
No tool/workrest.

Solution


Abrasive wheels used on bench and pedestal grinding machines must be equipped with safety guards. The safety guard encloses most of the wheel — covering the flange, spindle end, and nut projection — while allowing maximum exposure of the wheel periphery. The exposure of the wheel should not exceed 90 degrees or one-fourth of the periphery (see diagram below).

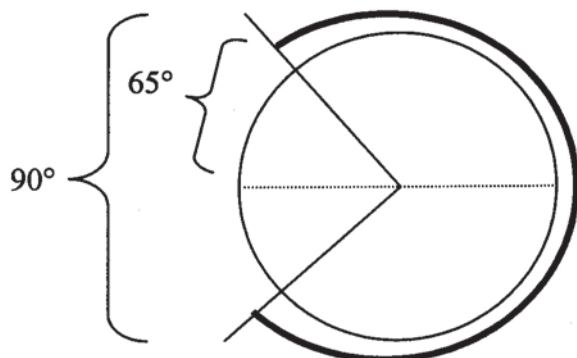

This exposure begins at a point not more than 65 degrees above the horizontal plane of the wheel spindle. Wherever the nature of the work requires contact with the wheel below the horizontal plane of the spindle, the exposure must not exceed 125 degrees.

Because the safety guard is designed to restrain the pieces of a shattered grinding wheel, the distance between the safety guard and the top periphery of the wheel must not be more than 1/4-inch. If this distance is greater because of the decreased size of the abrasive wheel, then a “tongue guard” must be installed to protect workers from flying fragments in case of wheel breakage. This “tongue guard” should be adjustable to maintain the maximum 1/4-inch distance between it and the wheel.

An adjustable tool/work rest must also be installed and maintained at a maximum clearance of 1/8-inch between it and the face of the wheel. In addition to offering a stable working position, this small clearance must be maintained to prevent the operator’s hands or the work from being jammed between the wheel and the rest, which may cause serious injury or wheel breakage.

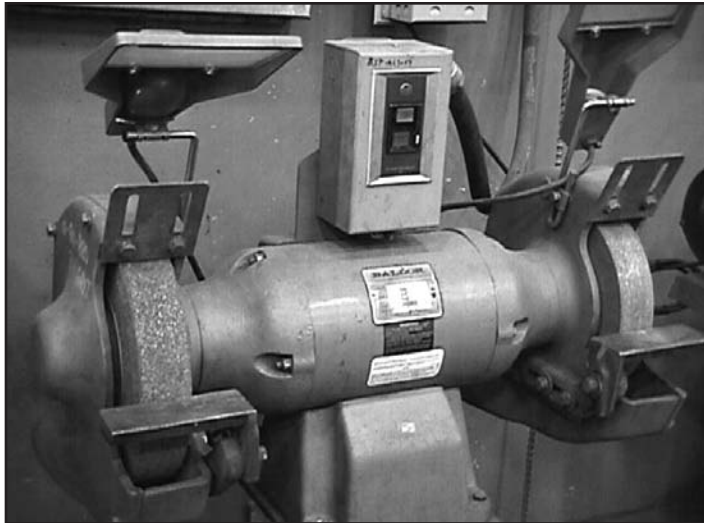

- Proper exposure angle (90°)
- Adjustable “tongue guards” (1/4”)
- Adjustable tool/work rest (1/8”)

Plastic glass (Plexiglas) shields are optional. They are not a substitute for eye/face protection and are not included as a part of the guard (unless they are adjusted accordingly and have strength equal to that of the safety guard).

All abrasive wheels must be closely inspected and ring-tested before mounting to ensure that they are free from cracks or other defects. Wheels should be tapped gently with a light, nonmetallic instrument. A stable and undamaged wheel will give a clear metallic tone or “ring.” If a wheel sounds cracked (dead), do not use it. This is known as the “ring test.”

The spindle speed of the machine must also be checked before mounting the wheel to be certain that it does not exceed the maximum operating speed marked on the wheel.

Always follow the manufacturer’s recommendations.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.215

■ Construction

Oregon OSHA Division 3/Subdivision I 29 CFR 1926.300(b)(7) & 29 CFR 1926.303

■ Agriculture

Oregon OSHA Division 4/Subdivision O OAR 437-004-2100

■ ANSI B7.1 *Safety Code for the Use, Care, and Protection of Abrasive Wheels*

■ ANSI B11.9 *Safety Requirements for Grinding Machines*

Worker's Fatal Injury Leads to OSHA Citations, Penalties for Milwaukee Foundry

Company Faces \$156,500 Fine for Safety Shortcomings

MILWAUKEE, WI -- Fatal injuries sustained by a foundry worker at Grede Foundries, Inc., Milwaukee Steel Foundry, Milwaukee, might have been avoided if safety procedures for abrasive grinding machinery had been followed, according to the Occupational Safety and Health Administration of the U.S. Department of Labor. OSHA has proposed a \$156,500 fine.

“Protecting the health and safety of workers in America is a chief goal of the U.S. Department of Labor,” said U.S. Secretary of Labor Elaine L. Chao. “OSHA’s standards prescribe excellent methods to keep workers safe from the hazards associated with grinding wheels, and we will make certain standards are followed.”

OSHA’s Milwaukee area office director, George Yoksas, said the agency opened an inspection of the foundry following the Jan. 7, 2003, accident that occurred when an abrasive wheel on a stand grinder exploded, propelling fragments that struck the grinder operator. The wheel guard was unable to contain the fragments from the 30-by-2-inch abrasive wheel.

As a result of that investigation, OSHA has proposed willful and serious citations alleging the lack of a preventative maintenance program, failure to ensure the grinder was running at an appropriate speed within the grinding wheel tolerance, and issues involving machine guarding and other adjustments to the machine.

Source: Federal OSHA Regional News Release, July 7, 2003

Band saw

Horizontal

Vertical

Horizontal band saw

A horizontal band saw uses a thin, flexible, continuous steel strip with cutting teeth on one edge. Horizontal band saws are used primarily for cutting metal stock, such as angle iron and other round and flat stock. The blade runs horizontally on two pulleys through two separate guides.

The operator secures the stock on the table and manually assists the saw as it cuts.

Hazard

Serious cuts or amputations can occur if the operator contacts the blade. Extreme caution is necessary because the operator's hands may come close to the saw blade, and the entire run of the blade cannot be fully guarded.

Solution

Guard the entire blade except at the point of operation (the working portion of the blade between the two guides). Band saw wheels must be fully encased.



Make sure the saw includes a tension-control device to indicate proper blade tension.

References

■ General Industry

*Oregon OSHA Division 2/Subdivision O 29
CFR 1910.212 — General Requirements for All
Machines*

■ ANSI B11.10 *Metal Sawing Machines*

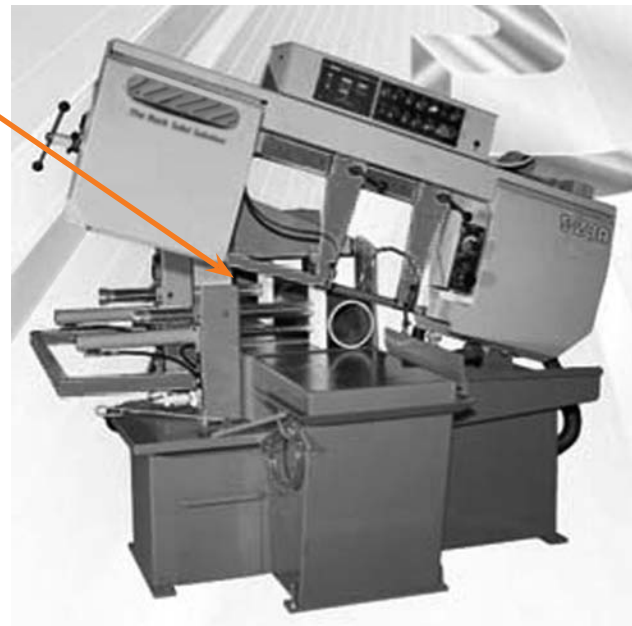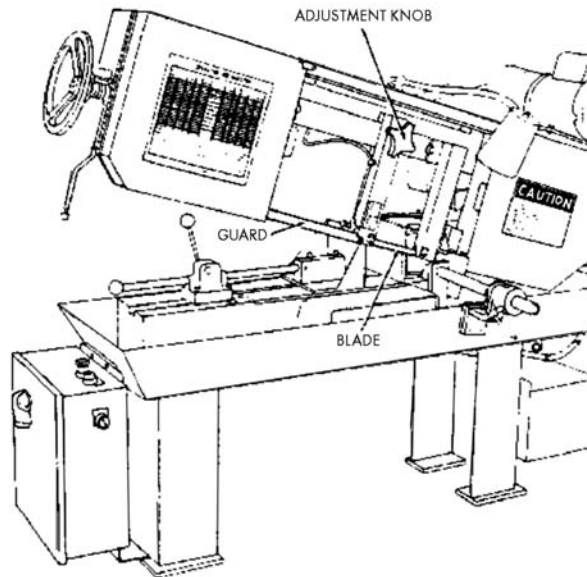

RL Johnson Co.

Vertical band saw

A vertical band saw uses a thin, flexible, continuous steel strips with cutting teeth on one edge. It is a versatile saw used to cut both wood and metal stock and also to cut and trim meat. The blade runs on two pulleys, driver and idler, and through a work table where material is fed manually.

In order to cut, the operator is required to hand-feed and manipulate the stock against the blade. The operator must also keep the stock flat on the work table and exert the proper amount of force.

Hazard

Serious cuts or amputations can occur if the operator contacts the blade. Extreme caution is necessary because the operator's hands may come close to the saw blade — and a band saw cannot be fully guarded.

Solution

Guard the entire blade except at the point of operation (the working portion of the blade between the bottom of the sliding guide rolls and the table).

Use an adjustable guard for the portion of the blade above the sliding guide rolls so that it raises and lowers with the guide. Properly adjust the blade guide to fit the thickness of the stock and ensure the guard is as close as possible to the stock.

Bandsaw wheels must be fully enclosed.

References

■ General Industry

*Oregon OSHA Division 2/Subdivision O 29
CFR 1910.213(i)*

■ Agriculture

*Oregon OSHA Division 4/Subdivision O
OAR 437-004-2000(4)*

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*


■ ANSI B11.10 *Metal Sawing Machines*



Georgia Tech Research Institute



Large portion of exposed blade at point of operation.

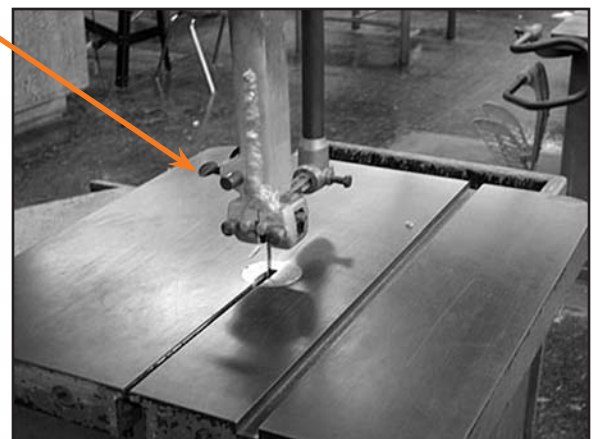

University of British Columbia

CNC turning machine

Computer numerically controlled (CNC) machining centers cut and shape an assortment of precision products from automobile parts to general machine parts. Operating in either horizontal or vertical positions, CNC machinery includes machining tools such as lathes, multi-axis spindles, and milling and boring machines; the functions formerly performed by human operators are performed by a computer-control module. CNC machinery is either hand loaded or automatically fed.

Most CNC machinery is partially or totally enclosed by metal enclosures equipped with thermoplastic vision panels, most commonly polycarbonate.



Stanley Hydraulic Tools

Hazard

Two primary hazards arise from CNC turning operations: Entanglement and the ejection of parts. Serious lacerations, fractures, amputations, or even death can occur if an operator contacts or becomes entangled in or between the tooling or rotating work piece. Similar injuries or death can also occur from being struck by ejected parts (e.g., cutters or other tools, chucks, or the work piece).

Although the risk of injury from ejected parts is lessened due to the interlocked enclosure of CNC machinery, recent research has shown that polycarbonate materials used in the unit's vision panels can degrade after exposure to the metalworking fluids and lubricants used in the machining process. Over time, vision panels may not be able to contain ejected parts. Most ejections at CNC turning machines are caused by a setup error or failing to properly maintain work-holding devices.

Unexpected movement or startup caused by faults in the control system can also cause serious injury.

Solution

To prevent access into the point of operation area, ensure the CNC machine is fully enclosed and equipped with an interlocked guard (door). The cutting tools should not start unless the door is in position and should stop when the door is opened. Many machines lock the guard in position during operation and can only be opened when the tooling stops. If access into the point of operation is infrequent, install a fixed enclosure that can be removed only for maintenance activities.

Automatic loading and unloading methods and automatic tool changing further reduce the exposure to the point of operation.

To prevent injury from ejected parts, make sure the polycarbonate vision panels are strong enough to contain ejected parts. Also, verify the appropriate rotational speed for the particular work piece and inspect the chuck jaw assemblies, work piece clamps, and all component parts of the turning fixtures.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 — General Requirements for All Machines

Oregon OSHA Division 2/Subdivision J 29 CFR 1910.147 — The Control of Hazardous Energy (Lockout/Tagout)

- HSE Engineering Information Sheet #33 “CNC turning machines: Controlling risks from ejected parts”
- ANSI B11.22 *Safety Requirements for Turning Center and Automatic Numerically Controlled Turning Machines*
- ANSI B11.23 *Safety Requirements for Machining Centers and Automatic Numerically Controlled Milling, Drilling and Boring Machines*
- OSHA Safety Hazard Information Bulletin 00-06-23 “*Potential Hazards Associated with the Use of Replacement Materials for Machine Guarding*” (June 23, 2000)




Determine if the polycarbonate vision panels are strong enough to contain ejected parts.

Compacting and baling equipment

Compacting and baling equipment reduces large amounts of solid waste to smaller, more manageable units by means of powered rams. In general, compactors compress refuse into containers for transport. Baling equipment is designed to compress material (e.g., cardboard boxes) and produce a bale (bound or unbound) that is handled as a unit.

A wide range of hazards exist simply due to the size, configuration, and operation of compactors and balers. Some machines allow direct access to the compression chamber, while others have a hopper or chute through which material feeds into the machine. Machines may operate in a manual, semiautomatic, or automatic mode. The rams may move vertically or horizontally.

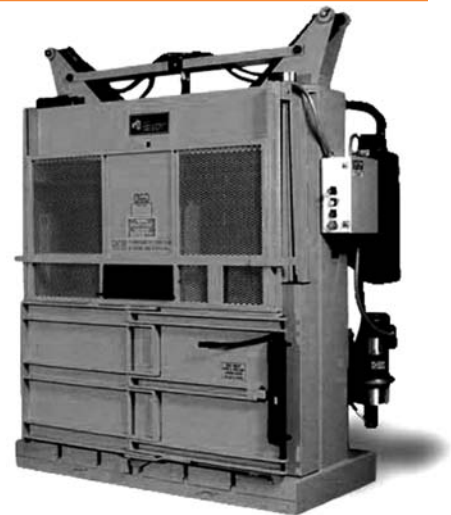

Pacific Compactor Corporation

Hazard

Workers can be crushed by the ram motion if guarding is missing or bypassed, or if lockout procedures are not followed during maintenance activities. Older compacting equipment may not have appropriate interlock guarding or may not have enough guarding to enclose the chamber or point-of-operation area completely.

Severe injury and death can also occur during service or maintenance tasks on or inside an energized or jammed machine if the machine cycles automatically, or if the machine is activated by another worker who is unaware that someone is inside the chamber. Furthermore, because ram motion ceases during a jam, workers may not recognize that the machine remains energized and that the ram could activate unexpectedly. Similarly, if conveyors are used to feed material into a compactor or baler, workers may mistakenly believe that shutting down the conveyor also prevents the compactor or baler from operating.

In addition to the hazardous-energy potential, working inside these machines may also present confined-space hazards such as hazardous atmospheres and engulfment.

Solution

Access covers and point-of-operation guarding must be interlocked in such a manner that the compactor cannot be operated if the guard or loading door is removed or opened. Most compactors and balers today prevent workers from reaching into the point of operation by configuration, cycling controls, and interlock guarding that interrupt or reverse the ram's motion if the compression chamber doors are opened. However, older equipment may not have these features and it would be wise to consult with the manufacturer for possible retrofits or upgrades.

Whenever unjamming, adjusting, cleaning, repairing, or performing other maintenance tasks, the machine must be isolated from all its energy sources and "locked out." If conveyors are used, they should be interconnected so that a single, lockable device can de-energize and isolate the power to both machines. *Lockout procedures are further explained on Page 64.*

Follow permit-required confined space entry procedures whenever working inside these machines.

Also, refer to Oregon OSHA's rules for *Stationary Compactors*, *Self Contained Compactors and Balers* for specific control, marking, and signage requirements.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O OAR 437-002-0256 — Stationary Compactors, Self-Contained Compactors, and Balers

Oregon OSHA Division 2/Subdivision J 29 CFR 1910.147 — The Control of Hazardous Energy (Lockout/Tagout)

■ *Oregon OSHA Division 2/Subdivision J 29 CFR 1910.146 — Permit-Required Confined Spaces*

■ *ANSI Z245.2 Stationary Compactors — Safety Requirements*

■ *ANSI Z245.5 Baling Equipment — Safety Requirements*

■ *NIOSH Publication No. 2003-124 Preventing Deaths and Injuries While Compacting or Baling Refuse Material*

Sixteen-year-old produce-market worker dies from crushing injuries

Caught in a vertical downstroke baler

A 16-year-old male produce-market worker died from crushing injuries after being caught in the vertical downstroke baling machine that he was operating. The victim, working alone in the basement of a small produce market, was crushing cardboard boxes when at some point in the compacting process he was caught by the machine's hydraulic ram. The victim was discovered by an exterminator spraying the basement, who told the store manager to call police and emergency medical services (EMS).

Subsequent examination by investigators revealed that the safety interlock had been bypassed, allowing the machine to operate with the loading door in the open position. The victim may have reached into the baling chamber during a compression cycle to adjust a tie wire or a liner box and was caught by the ram platen.

NIOSH investigators concluded that, to help prevent similar incidents, employers should:

- Ensure that all safety devices on baling machines are functioning correctly and enforce proper operation.
- Ensure that employees, including management personnel, know and understand the importance of the machine's safety features.
- Comply with child labor laws which prohibit youths younger than 18 from operating or assisting in operation of paper balers.
- Develop and implement a comprehensive employee safety program that includes training in the safe operation of machinery and the importance of the machine's safety devices.

Source: NIOSH FACE Report 2000

Cut-off saws

Although there are many specific types of cut-off saws, they are all circular saws designed to cross cut stock at exact lengths and angles. The following are some of the common cut-off saws used today.

Miter saw

A miter saw is a versatile circular power saw mounted on a hinged frame and designed to make accurate angle cuts. When the blade is lowered in a chopping motion, the blade cuts through the work piece, passing through a slot in the base.



DEWALT Industrial Tool Inc.
Miter saw

Chop saw

A chop saw is a lightweight circular saw mounted on a spring-loaded pivoting arm and supported by a metal base. The operator clamps the stock to the fence, pulls the blade through the work piece, and guides the saw back to its upright position. Chop saws typically do not have the cutting capacity of miter saws.



DEWALT Industrial Tool Inc.
Chop saw

Swing saw

Swing saws, both overhead and inverted, are swung from a pivot, either above or below the saw arbor. The operator positions the stock, pulls the saw across to make the cut, and then returns the saw to its original position.

Jump saw

Similar to an inverted swing saw, a jump saw is a circular saw located underneath the stock and hold down (clamp) and is attached on an arm that pivots from behind the saw arbor at approximately the same height. After the stock is positioned, the blade comes up, cuts the stock, and drops below the table surface. These “undertable” saws are normally operated by a knee or foot pedal.

Hazard


Severe cuts to or amputations of the fingers or hands can occur if they come in contact with the saw blade. If the rotating blade is not properly guarded, exposure can occur during operation or when the saw is idling.



Unguarded miter saw.

Overhead swing saws can pose additional hazards if the return device fails, if the saw bounces forward from a retracted position, or if the saw blade is able to go past the edge of the table, possibly contacting the operator's body.

Although not as common as with rip saws, hazardous kickbacks might also occur.

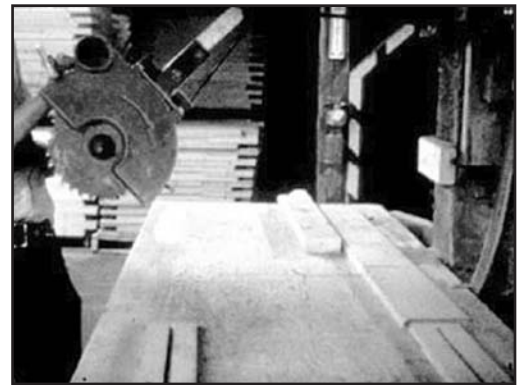


Overhead swing saw missing a lower blade guard and extending beyond table edge.

Solution

Overtable cut-off saws (miter, chop, and overhead swing saws) must be provided with fixed hood guards that enclose the arbor and top half of the saw. These saws also must be equipped with a self-adjusting lower blade guard that automatically adjusts itself to the thickness of the material being cut and provides continuous protection from the blade. Most guards supplied by manufacturers are designed to move out of the way as the blade nears the cut. If a guard seems slow to return to its normal position, adjust or repair it immediately.

Overhead swing saws must be provided with a device (i.e. counterweight) to return the saw automatically to the back of the table when released at any point of its travel. Limit chains must also be provided to keep the saw from swinging beyond the front or back edges of the table.

Inverted (undertable) swing saws and jump saws when idling are guarded by their enclosure. During operation, a hood-type guard or clamping means must be provided for the blade portion that protrudes above the table or above the stock being cut in addition to holding down the stock. Furthermore, these saws must have a “nose guard” affixed to the saw table in front of the hood guard (or another method providing equivalent protection) to prevent accidental entry of fingers or hands into the path of the saw blade from the front (Oregon OSHA Employer Alert, Sept. 15, 2000).

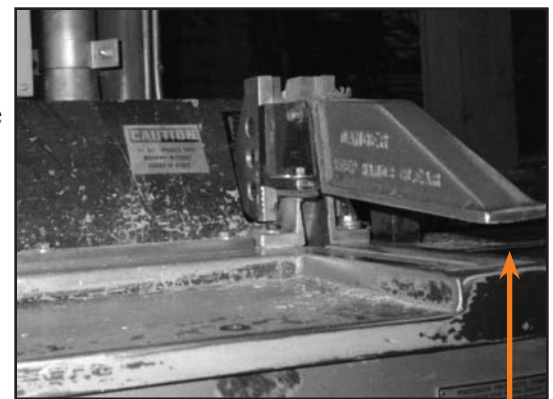

Missing “nose guard” on this jump saw.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(g) — swing saw

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(h)(1) — miter/chop saw

■ Construction

Oregon OSHA Division 3/Subdivision I 29 CFR 1926.304(g)(1) — miter/chop saw


■ Agriculture

Oregon OSHA Division 4/Subdivision O OAR 437-004-2000(5)

■ ANSI O1.1 *Woodworking Machinery — Safety Requirements*

Drill press

The drill press is a versatile machine that uses a multiple-cutting-edged drill bit secured in a rotating chuck to bore and drill holes, normally into wood stock. Either in floor or bench-top designs, drill presses are usually arranged vertically, requiring the operator to raise and lower an operating handle in order to control the drill bit. These machines also have variable speeds and some have multiple spindles for gang drilling. The most commonly used drill press is a single-spindle, floor-mounted, belt-driven machine for non-production drilling.

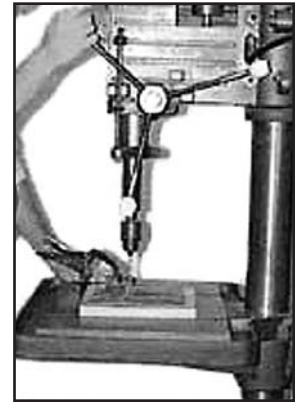

VA Tech Machine Site

Hazard

Serious lacerations and entanglement can occur if operators contact the rotating bit or chuck, or when operators try to hold the stock by hand when drilling. If not adequately secured, the stock can spin violently and contact the operator and others nearby. Also, injuries can occur from a projected chuck key if it is left in the chuck.

Solution

Use jigs or fixtures to fasten the stock to the bed and stabilize the work piece. This allows the stock to be secured for drilling and also allows the operator's free hand to be positioned away from the rotating chuck and drill bit. The drill bit is more likely to grab and twist an unstable work piece.



The stock can spin if not adequately secured to the table.

In many repetitive drilling applications, specially designed guards or shields are installed to protect the operator from the potential exposure to rotating drill chucks and drill bits. A fixed universal-type shield can be used on larger gang drills.

References

- **General Industry**
Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(l)
- *ANSI 01.1 Woodworking Machinery – Safety Requirements*

Ironworker

Ironworkers are versatile, multistation metal fabricating machines that offer component tooling options to perform punching, shearing, notching-coping, and sometimes bending operations. The workstations can work singly or simultaneously and all tooling moves vertically. Ironworkers are normally powered hydraulically.

Hazard

Severe crushing injuries or amputations can occur if an operator makes contact with any of the pinch or shear points this machine provides.

Flying or ejected parts from either the stock or the tooling can strike operators and other workers in the area. Furthermore, punches are hardened and will not bend as they collide with dies. If a punch is out of alignment, it is more likely to flake or even explode, causing serious harm to the operator.

Unprotected foot pedals can also introduce the possibility of accidental cycling.

Solution

Guard all pinch and shear points with fixed or adjustable guarding. Guards should be adjusted down to within 1/4-inch from the top of the material to the bottom of the guard (or stripper when punching). Most newer machines are equipped with adjustable restrictors that surround the material in-going areas and should allow just enough clearance for the material to enter.

Beware of machines with automatic urethane hold-downs. These hold-downs, if not adjusted properly, also come down with many tons of force and can be hazardous pinch points.

Ensure proper alignment of the punch and dies.

Cover foot pedals to prevent accidental cycling.


References

■ General Industry


Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 — General Requirements for All Machines

Oregon OSHA Division 2/Subdivision J 29 CFR 1910.147 — The Control of Hazardous Energy (Lockout/Tagout)

■ ANSI B11.5 *Safety Requirements for the Construction, Care, and Use of Iron Workers*

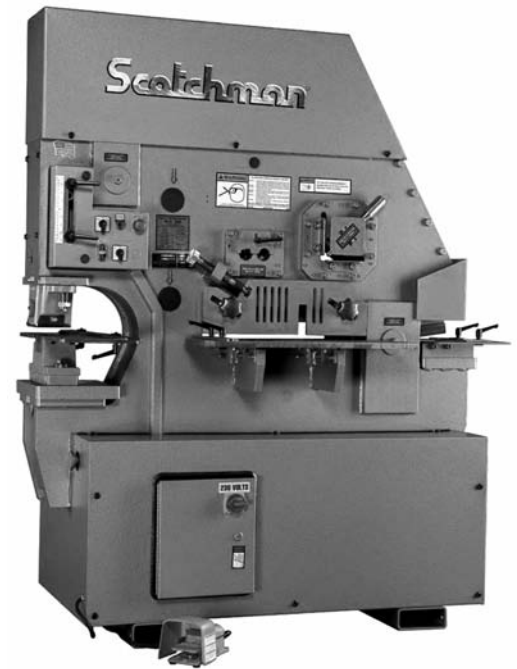

Scotchman Industries, Inc.

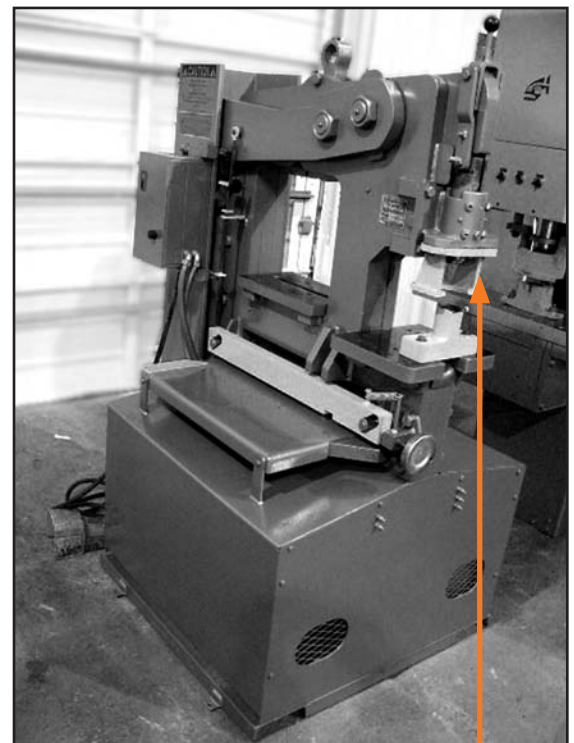


“Strippers” are designed to hold the material down and may also provide some protection from the punch hazard.

Jointer

Jointers face and straighten wood and are used primarily to square edges. The operator passes stock over a cylindrical, multiple-knife cutting head while keeping the stock flush against a guide.

Hazard


Severe lacerations or amputations can occur if the operator's hands and fingers come in contact with the knives. This can happen when operating an unguarded machine, jointing narrow lengths of stock when not using a jig or other holding device, or when the operator's fingers ride along the surface of the jointer and through the self-adjusting guard while feeding the wood. Also, stock may kick back and expose the operator's hands to the cutter head.

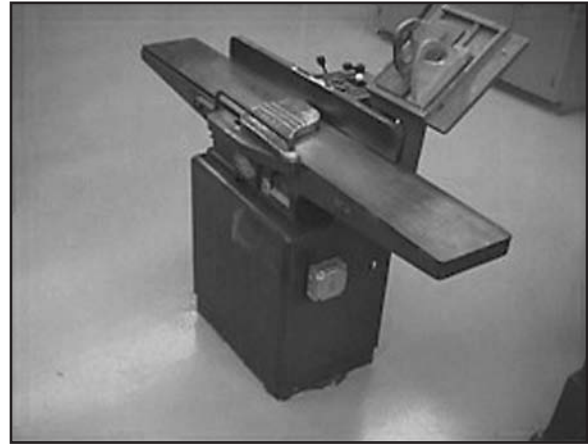


Warren Township High School
Gurnee, Ill.

Solution

A spring-loaded, self-adjusting guard must be provided to enclose the horizontal cutting head when stock is not being fed. The guard automatically adjusts to cover the unused portion of the head and remains in contact with the stock at all times. A guard must also cover the section of cutting head behind the fence (gage). *For vertical-head jointers, completely enclose the cutter head except for the slot to apply the stock. This guard can be part of the local exhaust system.*

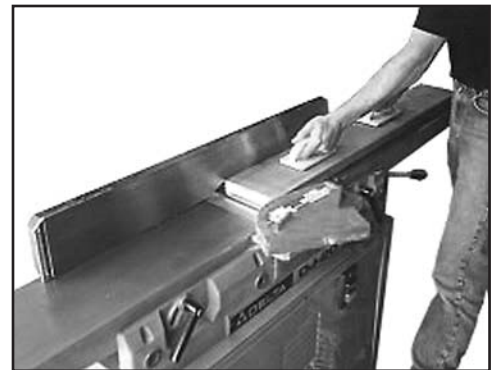

Unique Projects

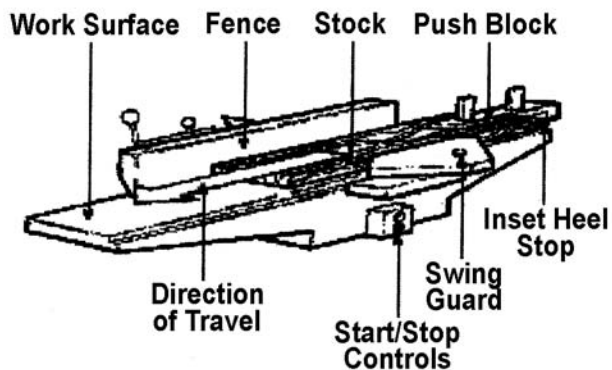

The knife projection on the cutting head must not be more than 1/8-inch beyond the cylindrical body of the head. The clearance between the edge of the rear table (infeed) and the cutting head must not exceed 1/8-inch. The opening in the table must be kept as small as possible.

Hold-down push shoes and sticks are recommended when using the jointer.

References

- General Industry
Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(j)
- ANSI 01.1 *Woodworking Machinery — Safety Requirements*

Lathe


Metal

Wood

Metal lathe

A metal lathe is a precision turning machine that rotates a metal rod or irregular-shaped material while a tool cuts into the material at a preset position. Similar to the wood lathe, the metal lathe normally consists of a headstock and base that houses one or more spindles on which a work-holding device (chuck) can drive the stock and the cutting tools can remove metal, producing mainly cylindrical and conical shapes.

There are basically two main types of metal lathes: Lathes for shaft work (material supported at two or more locations) and lathes for bar (bar stock introduced through the spindle) or chucking work (individual pieces secured at the chuck). Shaft lathes include engine lathes, vertical-shaft lathes, and turning centers. Bar and chucking lathes include turret lathes (vertical and horizontal) and vertical boring mills.

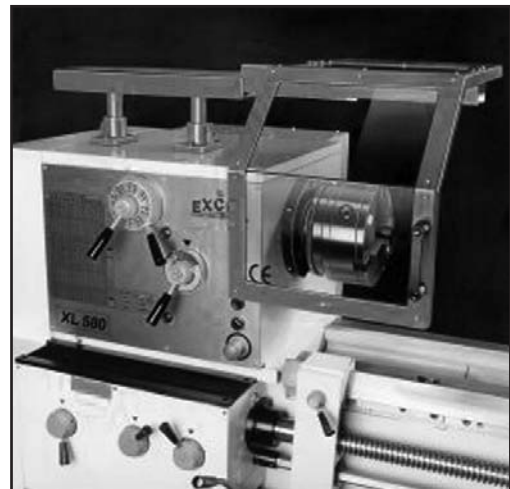

RDM Industrial Services Ltd.

Hazard

Severe injuries and death can occur primarily from being caught in or struck by rotating parts. An operator can be pulled into the lathe from working perilously close (e.g., polishing a slotted shaft with emery cloth) and/or wearing gloves, loose clothing, hair, jewelry, etc. Trapping spaces are also created between the cutting tool, its mounting, and the work piece or chuck.

Projected parts or material such as chuck keys or unsecured work pieces can also strike nearby operators.

Flying chips and coolant also present hazards to the operator.



Hazardous exposures are present simply due to the operator's close proximity to the lathe's rotating parts.


Solution

Avoid wearing gloves, loose clothing, long hair, jewelry, or other dangling objects near lathe operations. Pay close attention to work pieces that have keyway slots or other surface profiles that may increase the risk of entanglement. Assess the need to manually polish (e.g., emery cloth) rotating material. If necessary, consider milling keyways or other profiles after polishing or use emery cloth with the aid of a tool or backing boards. Always use a brush or tool to remove chips.

Cover work-holding devices (chucks) and tool trapping space hazards (especially in automatic or semiautomatic modes) with secured fixed or movable guards or shields. Vertical lathes and controlled turning centers are normally provided with fixed or interlocked guarding that prevents access during the automatic cycle.

Make sure all work pieces and work-holding devices are secure and free from defects. Remove the chuck key from the chuck after securing the material. A good rule is to never take your hand off the chuck key until you set it back onto a table. Consider using a spring-loaded wrench.

Provide a chip/coolant shield unless another guard or shield already provides protection. This does not replace the need for eye and face protection, however.

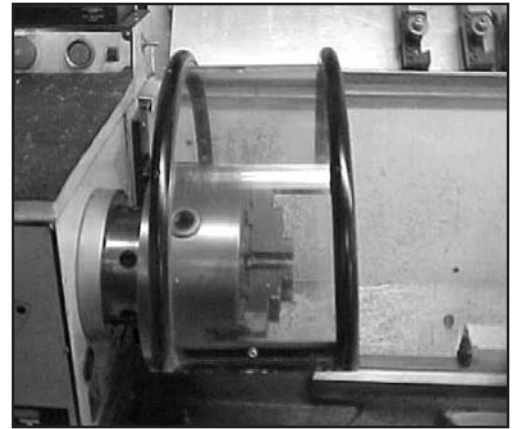

Chipmakers Metalworking World

NOTE: *Guards or shields used to protect lathe operators from projected parts must either be from the manufacturer or, if fabricated in-house, meet or exceed the same impact-resistance specifications as the original manufactured part. Various materials (such as polycarbonates) may possess different and less effective impact-resistance characteristics than the original materials used by the manufacturer.*

In one case, an operator was killed when the bell casting on a lathe came loose while the lathe was turning and was propelled through two, ½-inch-thick Plexiglas windows. The Plexiglas was installed as a replacement for the manufacturer’s original composite window on the machine’s door frame. The operator was fatally struck in the head and neck as he was looking through the window.

The manufacturer’s original observation window was made of a ¼-inch-thick laminated glass plate with a ½-inch-thick polycarbonate window, separated by an approximately ¼-inch air space. The original window was replaced with Plexiglas material that had a lower impact resistance than the polycarbonate shield originally supplied by the machine manufacturer.

Polycarbonates are a family of various polymers that includes Macrolux, Lexan, Relex, Replex, Dynaglass, Exolite, Verolite, Cyrolon, and Makrolon. These materials have different impact-resistance characteristics for different thicknesses and surface areas. It is important to note that increasing the thickness beyond a certain level does not always improve or increase the impact resistance. Furthermore, some studies have shown polycarbonate degrades due to age and prolonged contact with metalworking fluids and lubricants.

References

■ General Industry

- Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 — *General Requirements for All Machines*
- Oregon OSHA Program Directive A-236 “*Guarding: Metal Lathe Chucks (Engine Lathes)*” (April 4, 2000)
- OSHA Safety Hazard Information Bulletin 00-06-23 “*Potential Hazards Associated with the Use of Replacement Materials for Machine Guarding*” (June 23, 2000)
- HSE Engineering Information Sheet #33 “*CNC turning machines: Controlling risks from ejected parts*”
- HSE Engineering Information Sheet #2 “*Accidents at metalworking lathes using emery cloth*”
- ANSI B11.6 *Lathes - Safety Requirements for Construction, Care, and Use*

Wood lathe

While most tools rotate or move a blade or bit to cut, the wood lathe moves the work piece being cut. The wood lathe is used to turn stock into round objects by securing the stock between two centers: the headstock and tailstock (spindle turning), or by securing the work to the headstock only with a faceplate (facing). Spindle turning is used for long objects such as table and chair legs, while facing is used for cups, bowls, and plates.

The stock rotates rapidly while the operator applies a single-point tool to the wood. The operator holds the tool on a tool rest and advances it along the length of the tool rest to shape the stock as desired.



Delta Inc.

Hazard

Due to its unique operation — rotating the stock being cut — the lathe presents several concerns. The primary hazards arise when using a hand tool against the rotating stock, and, in the close proximity the operator has to the rotating parts.

Serious injuries can occur if the tool becomes caught between the rest and the rotating stock, bringing the operator's hands in with it. Also, hands, arms, clothing, hair, or jewelry may be caught on the rotating parts and pulled into the machine simply because of the close distance the operator is from the machine's components.




Projected or broken work pieces can be another hazard if not secured between the centers or if the work piece is defective. Furthermore, chuck keys can project if left in the chuck. Flying wood chips from the turning operation also can pose a hazard on wood lathes.

Solution

Cover all rotating parts and points of operation with shields.

Cover lathes used for turning long stock with long curved guards that extend over the top of the lathe. These shields, or guards, must protect the operator if the stock comes loose and is thrown from the machine.

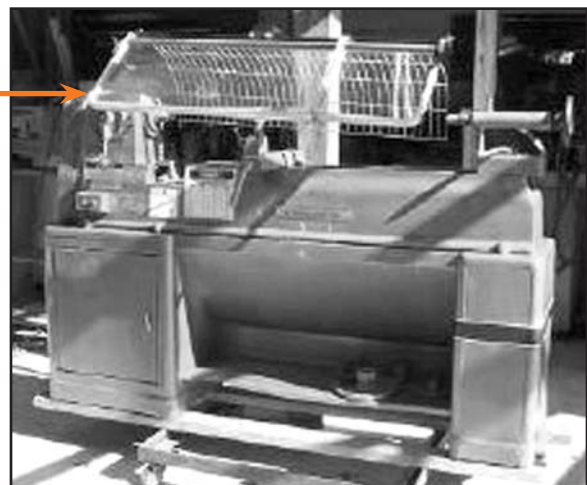

Make sure the tool rest is secure and set close to the stock (1/8-inch). Rotate the stock by hand to make sure it clears the tool rest before turning the lathe on. Guide the turning tool on the rest only — do not attempt to support the tool with your hands.

The work piece must be secured and should be free of cracks, splits, knots, and other defects. Check for weak glue joints.

Remove chuck keys or adjusting wrenches. Develop the habit of never letting go of the chuck key or wrench when you are using it. Consider using a spring-loaded chuck wrench.

Check to make sure that the chuck is secured before turning the lathe on.

Never permit operators to wear loose clothing, long hair, jewelry, dangling objects, or gloves.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(o)

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*



Make sure the tool rest is secure and set close to the stock.

Machine operator dies

Shirt sleeve was caught by the rotating bit of a milling machine

On June 16, 1999, a 57-year-old male supervisor/mill operator was fatally injured after his shirt sleeve was caught by the rotating bit of the milling machine he was operating. The rotating bit tightened the shirt around his neck, strangling him.

The victim, working alone, was clamping 8-inch by 8-inch by ½-inch-thick steel plates to the table while the bit was rotating. A co-worker was passing by and noticed the victim caught in the running mill press. The co-worker shut off the machine as another co-worker arrived to help. Both co-workers were trying to hold up the victim while a third co-worker went to call for emergency assistance.

The victim was transported to the hospital where he was pronounced dead. The investigation concluded that to prevent similar occurrences in the future, employers should:

- Guard moving machine parts to prevent employee contact with them.
- Instruct employees to have the drill spindle engaged only when ready to start drilling.
- Ensure that drill presses, milling machines, and similar equipment have emergency stops and convenient and accessible switches.
- Develop, implement, and enforce a comprehensive safety program that includes, but is not limited to, training on all equipment used to complete tasks.

Source: NIOSH FACE Report 1999

Milling machine

A milling machine removes material from a work piece by rotating a cutting tool (cutter) and moving it into the work piece. Milling machines, either vertical or horizontal, are usually used to machine flat and irregularly shaped surfaces and can be used to drill, bore, and cut gears, threads, and slots.

The vertical mill, or “column and knee” mill, is the most common milling machine found in machine shops today. The general construction of this mill includes the quill, which moves vertically in the head and contains the spindle and cutting tools. The knee moves up and down by sliding parallel to the column. The column holds the turret, which allows the milling head to be positioned anywhere above the table. Hand wheels move the work table to the left and right (X axis), in and out (Y axis), in addition to moving the knee, saddle, and worktable up and down (Z axis).

Hazard

Serious injuries and entanglement can occur if the operator contacts the rotating cutter. Metal shavings and lubricating/cooling fluids might also present a risk from the point of operation area.

Material might spin and strike an operator if the material is not secured to the table.

Injuries can also occur from a projected wrench if it is left in the spindle.

Solution

Secure the work piece either by clamping it onto the work table or by clamping it securely in a vise that is clamped tightly to the table.

NOTE: Computer numerical controlled (CNC) mills are rapidly replacing manually fed machines, mainly for versatility and production reasons. The increased automation does not normally require the operator to move the hand wheels (like the traditional machines) so operators must always keep their hands away from the point of operation. A guard or shield that encloses the cutter head or milling bed may be considered to protect the operator from the cutting area, flying metal shavings, and lubricating or cooling fluids.


Make sure the tightening wrench is removed from the mill.

References

- **General Industry**
Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 — General Requirements for All Machines
- *ANSI B11.8 Drilling, Milling, and Boring Machines*




Georgia Tech Research Institute

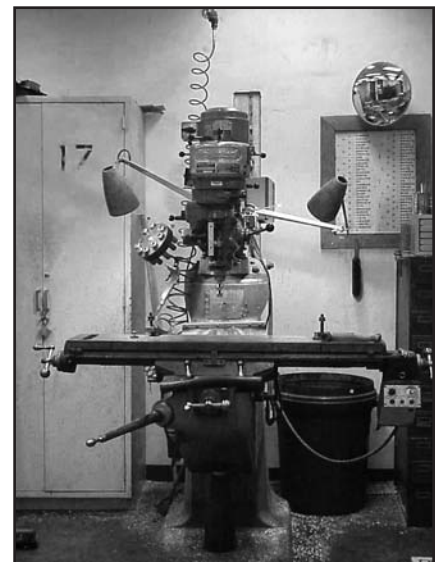

Illinois Institute of Technology

Vertical “column and knee” mill.

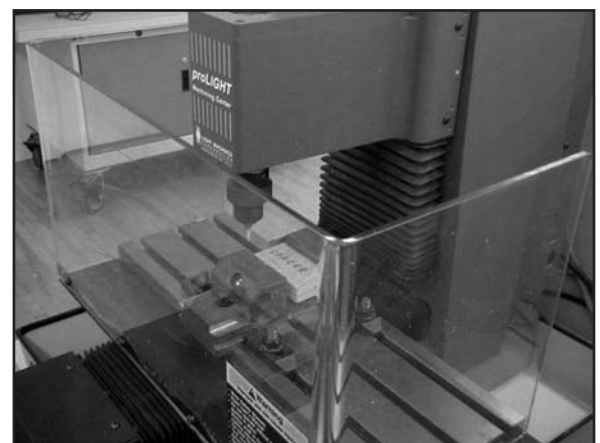

Ball State University

In some cases, a shield can provide an operator protection from the cutter as well as from metal shavings and metal working fluids.

Planer

Planers are most frequently used to produce smooth faces on boards and to mill them to particular thicknesses. Planers are different from jointers because of their capacity to plane wider surfaces and the capability to control thickness.

Planers have automatic feed systems that pull the work through the horizontally rotating blades and out the back.

Hazard

Severe lacerations or avulsions can occur if the operator's hand or arm is fed through the machine and contacts the cutting heads.

Serious injury can also occur from kickback. A kickback can occur when lowering the table with the power on and the stock still in the machine, feeding stacked boards, or planing boards shorter than the manufacturer's recommendation.



DEWALT Industrial Tool Co.

Solution

Keep the machine guards in place at all times.

Keep your hands out of the machine feeding area and allow the planer to pull the stock through.

Never lower the table during operation and never feed stacked boards. Also, follow manufacturer's recommendations for allowable material dimensions.

Keep your body to the side of the stock.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(n)

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*



Cornell University

Portable tools

Abrasive grinder

Belt sander

Circular saw


Jig saw

Portable abrasive grinder

One of the most common portable tools found in virtually any shop, the portable grinder is incredibly useful for grinding and finishing material of all shapes and sizes.

Hazard

The hazards associated with portable grinders are similar to those of pedestal or bench grinders. First of all, serious abrasion or cuts can occur from contacting the rotating abrasive stone. There is also the potential for the abrasive stone to shatter, plus the dangers of exposure to the rotating wheel, flange, and spindle end from kickback. Finally, other concerns such as flying fragments and sparks are present during portable grinding operations.

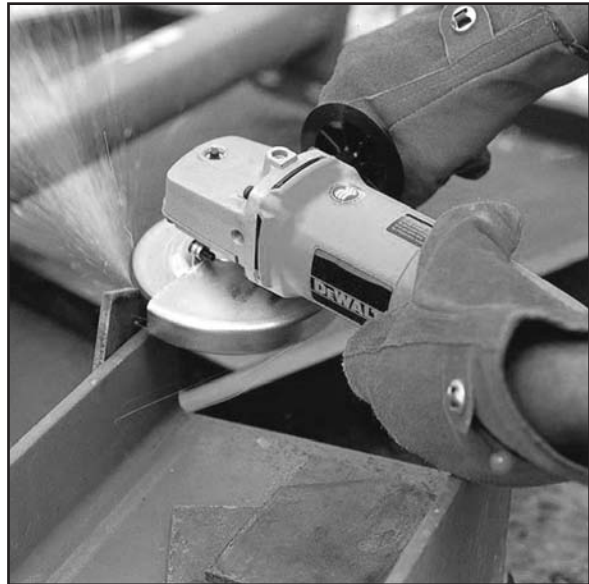

DEWALT Industrial Tool Co.

Solution

These types of grinders normally come with the manufacturer's safety guard covering most of the wheel. Abrasive grinder exposure must not exceed a maximum angle of 180 degrees and the top half of the wheel must be enclosed at all times. The guard must be mounted so it maintains proper alignment with the wheel.

Vertical "right angle" grinders must have a 180-degree guard between the operator and wheel. The guard must be adjusted so that pieces of a broken wheel will be deflected away from the operator. The above picture depicts a properly guarded "right angle" grinder.

Cup wheel grinders must be guarded as described above or be provided with special "revolving cup guards," which mount behind the wheel and turn with it.

There are exceptions for guarding based on work practices and for other grinders (Oregon OSHA Division 2/Subdivision P 29 CFR 1910.243(c)(1)). Natural sandstone wheels and metal, wooden, cloth, or paper discs that have a layer of abrasive on the surface are not covered by Oregon OSHA's portable abrasive grinder rule.

All abrasive wheels must be closely inspected and "ring-tested" before mounting to ensure that they are free from cracks or other defects. The spindle speed of the machine also must be checked before mounting the wheel to be certain that it does not exceed the maximum operating speed marked on the wheel. Always follow the manufacturer's recommendations.

References

- **General Industry** — *Oregon OSHA Division 2/Subdivision P 29 CFR 1910.243(c)*
- **Construction** — *Oregon OSHA Division 3/Subdivision I 29 CFR 1926.303*
- **Agriculture** — *Oregon OSHA Division 4/Subdivision P OAR 437-004-2230(3)*
- *ANSI/UL 45-1990 Portable Electric Tools*
- *ANSI B7.1 Safety Code for the Use, Care, and Protection of Abrasive Wheels*
- *ANSI B11.9 Safety Requirements for Grinding Machines*

Portable belt sander

The portable belt sander is a general-purpose finishing tool. The belt is looped around two or more pulleys. The belt sander's linear motion makes it an excellent tool for sanding with the grain of the wood.

Hazard

Serious abrasion can occur from contacting the moving belt.

In-running nip points — created where the belt meets the pulley — can be present on the side of the tool. Nip points allow fingers, clothing, or hair to become caught in the tool.

Solution

Both hands should be used to operate the portable belt sander, one on the trigger switch and the other on the front handle.

Guard the unused runs of the sanding belt and all in-running nip points. This is normally accomplished by the tool's casing, enclosing the top portion of the belt and much of the side. The enclosure, or guard, on the sides must prevent the operator from contacting the nip points.


References

■ General Industry

Oregon OSHA Division 2/Subdivision P
29 CFR 1910.243(a)(3)

■ Agriculture

Oregon OSHA Division 4/Subdivision P OAR 437-004-2230(1)(d)

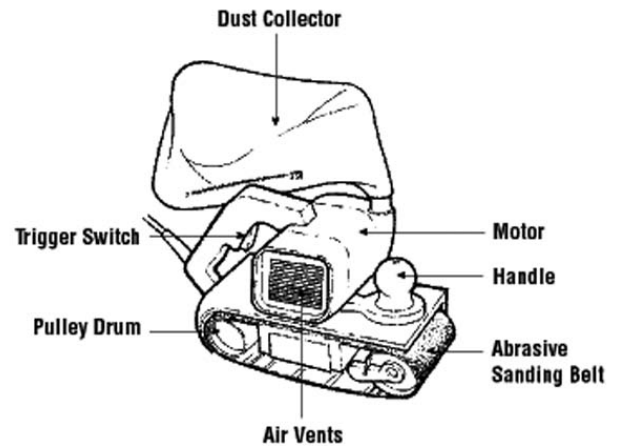

DEWALT Industrial Tool Co.

Portable circular saw

The portable circular saw is probably the most commonly used power saw. Circular saws are very versatile and are used to crosscut, rip, and bevel cut.

The operator adjusts the saw to the proper cutting depth and pushes the tool through the wood.

Hazard

Severe cuts and amputations can occur if the operator contacts the saw blade. Many injuries occur when the lower portion of the blade is fully exposed during operation or when the operator places his or her hand under the base plate (shoe) of the saw.


Kickbacks can also present a significant hazard. They occur when the saw blade binds in the cut and the saw kicks back toward the operator. Binding most often occurs when the piece being cut off is not allowed to fall down, if cutting on an incline, or between two saw horses and either the weight of the saw or the forward motion causes the saw kerf (line of cut) to close.

Solution

All saws with a blade diameter greater than two inches must be equipped with guards above and below the base plate (shoe). The upper guard must cover the saw to the depth of the teeth, except for the minimum arc required to permit the base to be tilted for bevel cuts. The lower guard must enclose the teeth as much as possible and cover the unused portion of the blade when cutting.

When the tool is withdrawn from the work, the lower guard must automatically and instantly return to the covering position. Check that the retracting lower guard has returned to its starting position before laying the saw down. If the saw is set down with the guard open, it usually spins in a tight circle — sometimes cutting its own cord or possibly your toes!

In addition, the lower guard must be equipped with a lug or lever, remote from the blade teeth, that will permit the operator to shift the guard safely for starting unusual cuts. Never hold or force the retracting lower guard in the open position — *never pin the guard up!*

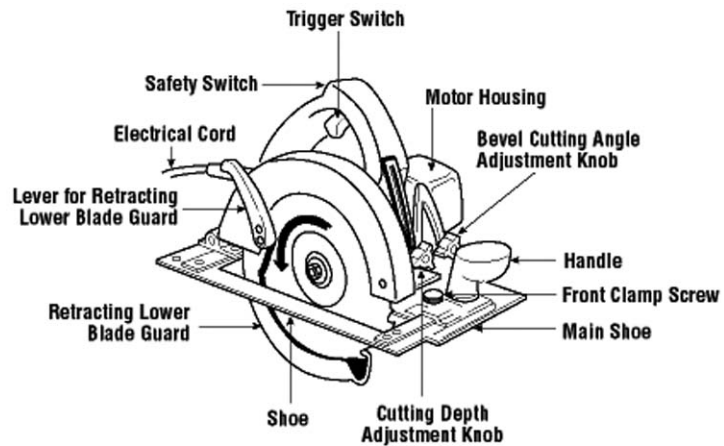

DEWALT Industrial Tool Co.

Kickbacks can be minimized by setting the proper blade depth so that the lowest tooth extends no more than 1/8-inch beyond the bottom of the material. This limits the area of the blade in the kerf and also exposes less of the blade if the saw does kick back.

It's also important to keep the saw kerf open, reducing the chance for the saw to bind. The board being cut should be positioned so that the weight of the cutoff keeps the saw kerf open as the cut is being made. If making a cut when both sides are supported (e.g., cutting between two sawhorses), lift the piece being cut off up and toward you as the cut progresses. Also, make sure you're not cutting uphill — even the slightest incline can cause the saw to bind. Furthermore, the saw must always move in a straight line. If the blade wanders from its straight path, the rear of the blade can bind against the side of the kerf. If the saw has to be turned off in the middle of a cut, make sure the blade has stopped spinning before taking your hand off the saw. Always keep your body out of the line of potential kickback.

Use two hands whenever possible, one on the trigger switch and the other on a front knob handle. Secure work being cut to avoid movement.

References

■ General Industry

Oregon OSHA Division 2/Subdivision P 29 CFR 1910.243(a)(1)(i)

Oregon OSHA Division 2/Subdivision P OAR 437-002-0266(1)

■ Construction

Oregon OSHA Division 3/Subdivision I 29 CFR 1926.304(d)

■ Agriculture

Oregon OSHA Division 4/Subdivision O OAR 437-004-2230(1)(a)

■ ANSI/UL 45-1990 *Portable Electric Tools*

Portable jigsaw

Handheld jigsaws are useful for cutting intricate curves and patterns in thin stock. They have thin blades that move rapidly up and down through the saw's guide plate. The blade is held in a chuck. The operator either holds the saw with one hand while the other hand is used to secure the stock, or the saw is held with both hands if the stock is already secured.

Hazard

Serious cuts can occur when the operator contacts the reciprocating blade. Much of the blade is exposed by design and contact can be made before or after the cut, or during the cut if the operator's hand is securing the material underneath the stock and in the path of the blade.

Solution

Ensure the portion of the blade above the guide plate is adequately guarded. This may require setting it to an appropriate height.

Be aware of the portion of the blade below the stock, especially if you are using one hand to secure the material.

Make turns slowly and use a narrow blade for sharp turns.



DEWALT Industrial Tool Co.

Power press

Power presses are metalworking machines used primarily to cut, punch, or form metal using tooling (dies) attached to the slide (ram) and bed. The slide has a controlled reciprocating motion toward and away from the bed surface and at right angles to it. It is guided in the frame of the machine — either a “C” frame [open back inclined (OBI)] or straight side frame — to give a definite path of motion.


The two most common types of power presses are mechanically and hydraulically powered. Though these two share common features, the mechanical power press is the most widely used throughout industry and has been the subject of most of the research done, primarily due to its tenure in industry and the number of injuries associated with it.

The main components for power transmission on a mechanical power press are the clutch, flywheel, and crankshaft. The slide is attached to a crankshaft with connecting rods (“pitmans”) and the crankshaft is coupled to the flywheel, which always rotates when the motor is running. A clutch is used to connect the spinning flywheel to the crankshaft. The crankshaft converts the rotary motion of the flywheel to the downward and upward motions of the press slide.

Two different types of clutches are used on mechanical power presses: full-revolution and part-revolution clutches. Full revolution clutches, when tripped, cannot be disengaged until the crankshaft has completed a full revolution and the press slide has completed a full stroke. Presses equipped with full-revolution clutches are typically older and more hazardous due to their cycling operation. A part-revolution clutch can be disengaged at any point before the crankshaft has completed a full revolution and the press slide has completed a full stroke. The majority of part revolution clutch presses use air and a brake. When air is trapped and compressed in chambers, the clutch is engaged and the brake is disengaged. To stop the press, the reverse takes place.

Manually fed presses are cycled either by foot or by two-hand controls or trips. With foot controls, the press is activated by pressing down on a foot switch or pedal, leaving the hands free during the cycling of the press. This freedom of hand movement places operators using foot controls at a greater risk of sustaining an injury at a point of operation. Approximately twice as many press injuries are from foot-controlled presses. With two-hand controls or trips, once a work piece is positioned in the press, both hands must be removed from the point of operation to depress the buttons.

The other major aspect of press operation involves safely installing, removing, and transferring the dies.

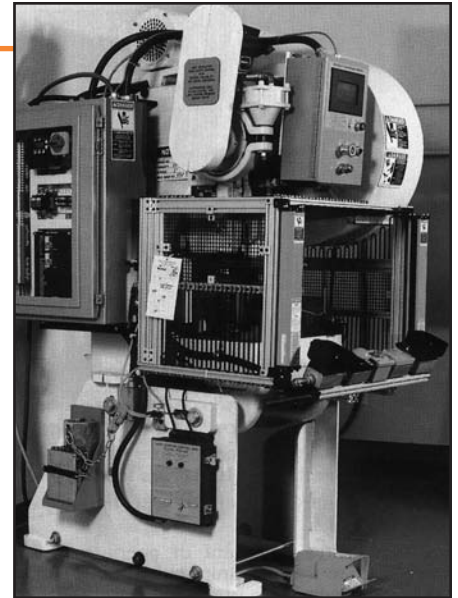

Rockford Systems Inc.



University of Toledo

Die setters circa 1975

Power press – continued

Hazard

A machine that punches metal in a blink of an eye leaves little to the imagination as to what it can do to body parts. Severe crushing injuries, amputations, and even death can occur in the point of operation or while performing servicing tasks such as die setting or troubleshooting.

Amputations are the most likely injury and have been a major focus of OSHA, prompting the agency to enhance enforcement and outreach efforts to prevent these injuries. According to the Federal Bureau of Labor and Statistics and the Oregon Department of Consumer and Business Services, approximately 10,000 amputations occur each year nationally and more than 200 occur annually in Oregon, many by power presses. Moreover, about half of all injuries from mechanical power presses result in amputations.

Flying or ejected parts from either the stock or the dies can also strike operators and other workers in the operation area.


Unprotected operating controls, especially foot pedals, also can introduce the possibility of accidental cycling.

Solution

The point of operation of all power presses must be safeguarded. Safeguarding is accomplished either by barrier guarding or the use of devices. Barrier guarding *prevents* entry into the die area by physically enclosing the point of operation. Devices *control* entry by allowing the operator to reach into the die area to feed or remove parts and will either prevent a machine cycle, stop the hazardous downstroke, or pull the operator's hands out if his or her hands are detected or remain in the point of operation. Guarding is not required if the point of operation opening is 1/4-inch or less.

Safeguarding choices for mechanical power presses depend on the clutch systems. Feasible methods for full-revolution presses include fixed or adjustable barrier guarding, two-hand trips, pullbacks, restraints, or type "A" gates. Part-revolution presses are usually equipped with barrier guarding, presence-sensing devices, two-hand controls or trips, type "A" or "B" gates, pullbacks, or restraints. The safeguarding options for a part-revolution press also can be installed on hydraulic presses.

Fixed, interlocked, or adjustable barrier guarding is best for applications where the operator does not need frequent access to the point of operation, for example, on a mechanical power press in continuous mode. An advantage to using barrier guarding is that it presents a physical barrier between people (the operator and other workers) and the machine's pinch point in addition to capturing any flying parts from either the stock or the die.

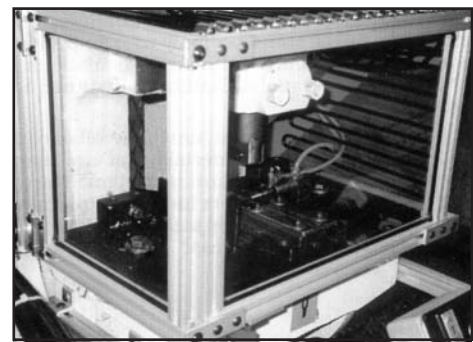

Rockford Systems Inc.

Barrier guarding on an OBI mechanical power press.

Power press – continued


Barrier guarding must be designed and constructed so that people cannot reach over, under, around, or through the guard and reach the pinch-point hazard. If there are openings in the barrier guard, the openings must be in compliance with the OSHA (or ANSI) guard-opening requirements. The following are the maximum permissible openings as listed in Table O-10 of OSHA’s *Mechanical Power Press Standard*:

Distance of opening from point of operation hazard (in.):	Maximum width of opening (in.):
½ to 1½	¼
1½ to 2½	⅜
2½ to 3½	½
3½ to 5½	⅝
5½ to 6½	¾
6½ to 7½	⅞
7½ to 12½	1¼
12½ to 15½	1½
15½ to 17½	1⅞
17½ to 31½	2⅞

The various openings are such that for average-size hands, an operator’s fingers won’t reach the point of operation.


Fixed barrier guards are, as the term implies, firmly fixed to the frame of the press or to the bolster plate, and do not have hinged, movable, or adjustable sections. Interlocked press barrier guarding has hinged or movable sections interlocked with the clutch/brake control so that the clutch cannot be engaged unless the guard sections are in proper position. When the interlocked guard section is opened, the press slide must either stop immediately or have already completed the die-closing portion of the stroke (full revolution clutch presses normally cannot be equipped with interlocked guarding). Adjustable barrier guarding can be adjusted for different material widths and thicknesses and still meet the acceptable guard opening distances (Table O-10).

Devices can be effective safeguards at the point of operation. They include presence-sensing devices, two-hand controls or trips, gates, pullbacks, or restraints. Presence-sensing devices (photoelectric “light curtains” are most commonly used) create an invisible sensing field and are designed to detect an operator’s hand, arm, or other body part entering the hazard area and either prevent a machine cycle or stop the hazardous motion of the machine. They are a versatile and popular method of safeguarding because they do not create a physical barrier between the operator and the point of operation, they allow complete visibility, and they can be “blanked” or “muted” (certain channels are bypassed) to allow material movement. They must be located at the proper *safety distance* (see page 42) from the point of operation and can only be used on part revolution presses and hydraulic presses that are capable of stopping hazardous motion quickly.

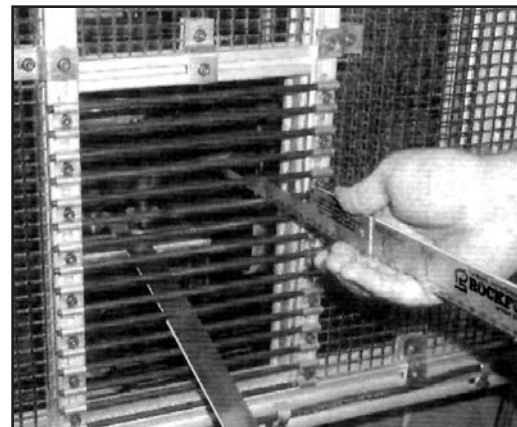

Rockford Systems Inc.

It’s important to check the “safe distance” of the guard opening to the point of operation. A guard opening scale, like the one above, can be used to easily determine compliance.

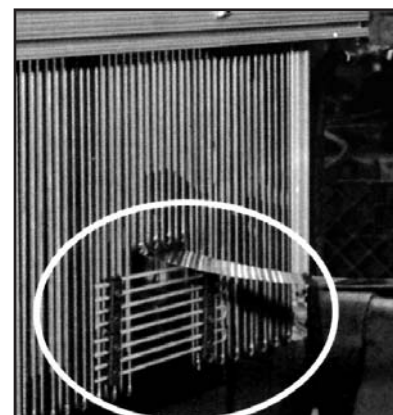

Rockford Systems Inc.

Adjustable barrier guarding.



Rockford Systems Inc.

Photoelectric “light curtain” on a hydraulic press.

Power press – continued

Two-hand controls are also used on part-revolution or hydraulic presses and require the use of both operator's hands to concurrently depress two individual palm buttons to cycle the machine. These controls must also require the operator to hold them down through the die-closing portion of the stroke (downstroke). Two-hand trips are similar to two-hand controls but are usually equipped on full-revolution presses. Trips require only momentary actuation of the palm buttons, and once the buttons have been actuated, they can be released quickly and the machine will make one full cycle or stroke. Of course, locating two-hand controls or trips at their proper *safety distances* (see below) are critical for operator safety. Also, they must incorporate both anti-tiedown and anti-repeat features. Anti-tiedown prevents "tying" one button down and still being able to cycle the machine by depressing the other. Anti-repeat prevents continuous cycling. If more than one operator is operating a press, each operator must have their own set of controls/trips.



Rockford Systems Inc.

Two-hand controls on a part revolution press.

Safety distance, as applied to press safeguarding using presence-sensing devices, two-hand controls, two-hand trips, and interlocked barrier guards, is a calculation to determine where these devices must be located from the point of operation hazard so that hazardous motion is effectively stopped or prevented before contact can be made. Safety distance is calculated with an equation using the maximum speed that someone can approach the hazard (63 inches/second) and the total time it takes to stop hazardous motion (seconds). Additional factors such as, but not limited to, depth penetration (presence sensing) and reaction times of the control system and safeguard interface are also included. Stopping time is normally measured using the brake monitor or a portable stop-time measurement device. *The ANSI formula takes more factors into account and normally results in a larger safety distance.*

Gates are movable barriers that enclose (in combination with barrier guards) the point of operation before the machine cycle can be started, and remain closed until the downstroke has completed. There are two types: A type "A" gate remains closed during the entire cycle and a type "B" gate remains closed during the downstroke only. Gates are normally constructed of clear polycarbonate and powered by air and gravity.

Pullback devices use a series of cables attached to the operator's hands or wrists. Slack is taken up during the downstroke cycle, pulling the operator's hands from the point of operation, if they are still there. Restraint (holdout) devices are also attached to the operator using cables or straps

but must be anchored and adjusted so the operator's hands can never reach into the point of operation. There is no retracting action involved. Consequently, hand-feeding tools are often necessary if the operation involves placing small material into the dies.



Rockford Systems Inc.

Pullback devices.



Rockford Systems Inc.

Type "A" gate.

Power press – continued

It's important to remember that most devices do not provide protection from flying parts. Also, control reliability (see Glossary) and a brake monitor (see Glossary) must be incorporated in part revolution mechanical power presses using a presence sensing device, two-hand control, type "B" gate, or interlocked barrier guarding.

Full-revolution mechanical power presses must incorporate a single-stroke (or anti-repeat) feature that allows the clutch to engage and the press to cycle only once each time the foot control or two-hand trips are depressed.

To prevent accidental cycling, effectively cover or guard all hand and foot controls. Furthermore, foot pedals must be attached to a nonslip surface to prevent the pedal from sliding.

Hand tools can be used for placing and removing material but they do not replace guarding.

Appropriate die-setting procedures must be established and followed to ensure the safe design, handling, installation, and removal of the dies. Safety blocks must be used and enforced. Weekly inspections and regular maintenance of presses, parts, auxiliary equipment, and safeguards must be followed and documented.

If the back of the press presents a hazard to others, prevent access with a barricade.

Notification of mechanical power press injury

All point of operation injuries associated with a mechanical power press must be reported to Oregon OSHA within 30 days of occurrence. Information such as the type of press, task performed, type of safeguards, cause of injury, and feeding method must be provided.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.217 Mechanical Power Presses

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 General Requirements for All Machines

- Oregon OSHA Program Directive A-69 "Power Presses: Mechanical Power Presses" (March 9, 2001)
- OSHA Instruction CPL 03-00-003 "National Emphasis Program on Amputations" (October 27, 2006)
- ANSI B11.1 *Safety Requirements for Mechanical Power Presses*
- ANSI B11.19 *Safeguarding When Referenced by the Other B11 Machine Tool Safety Standards — Performance Criteria for the Design, Construction, care, and Operation*
- NIOSH Publication No. 87-107 "Injuries and Amputations Resulting From Work With Mechanical Power Presses" (May 22, 1987)

Power press brake

These metalworking machines bend and form parts through the use of tooling (dies) attached to a ram or slide and a bed. Metalworking occurs by placing stock, primarily sheet metal, on a bottom die and pressing it with a top die attached to the movable ram.

Press brakes are mechanically or hydraulically powered, or both (hydra-mechanical brakes combine both). Mechanical (flywheel) press brakes use either mechanical friction or air friction clutches that can be disengaged at any point before the crankshaft has completed

a full revolution and the press slide has completed a full stroke. By inching and slipping the clutch, these presses allow the operator to drop the slide to the work piece and stop, adjust, or align the work piece, then complete the stroke. Hydraulic press brakes can normally be stopped at any point in their cycle and the force exerted by the dies can be varied. Operating speeds are normally slower than mechanical presses; however, because of their slower operating speeds they are normally not fully automated. Hydra-mechanical press brakes combine hydraulic and mechanical operations into one system.

Regardless of how the press is powered, the basic operation involves the operator feeding or placing the stock on the bottom die, positioning the stock properly, and activating the press cycle with hand or foot controls. However, one important difference between mechanical and hydraulic brakes is there is no way to reverse the stroke on mechanical brakes. Although it can be stopped or inched, the stroke must be completed. **NOTE:** *When operating a mechanical press brake, if the ram is not brought back up to or past top dead center (crankshaft rotation), the ram may drift back down the wrong way before the clutch re-engages. Not knowing where the ram is in relationship to the stroke is a reason for lost fingers among some press brake operators.*

Operating the press brake is only half of the overall operation — the other half involves installing, removing, and transferring the dies.

Hazard


If the press brake can bend metal with ease, it's obvious that this same capacity can cause serious injuries to operators, including severed or broken arms, hands, fingers, or any other part of the body. Although the actual operation of the press brake does not require the operator to place his or her hands or any part of his or her body into the point of operation, the close exposure to the closing dies still creates a significant risk. In addition, the stock can sometimes “whip” or bend up, creating a pinch-point hazard between it and the front face of the slide (A) or possibly “slapping” the operator if he/she is in the path of the rising material (B).

Installing and removing tooling provides the most direct exposure in the point of operation as the operator must place his or her hands between the two dies. The operator's hands or arms can be severely crushed if the ram were to fall during setup.

Unprotected operating controls, especially foot pedals, can also introduce the possibility of accidental cycling.



Georgia Tech Research Institute

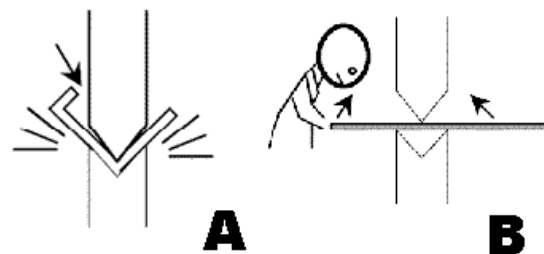


Steve D. Benson
thefabricator.com

Solution

Due to the flexibility needed to fabricate metal on press brakes, it comes as little surprise that these machines are difficult to guard. Fixed or adjustable barrier-type guarding at the point of operation is usually not practical because of the fabrication process (barrier-type guarding can be used to prevent exposure to the unused portions and ends of the tooling). However, feasible safeguarding methods, including presence-sensing devices, two-hand controls, pullbacks, or restraints, can often be used to safeguard the point of operation without reducing productivity.



Rockford Systems Inc.
Presence-sensing device (light curtain) used.

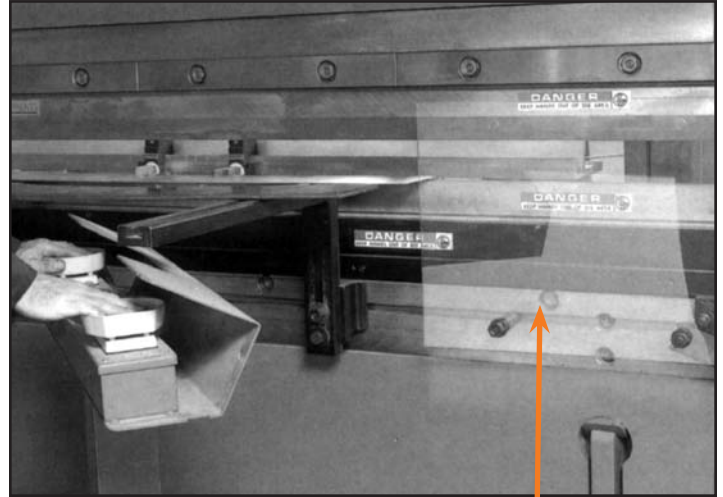

Cincinnati Inc.
Plastic shield (“end barrier”) preventing entry to the unused portion of full-length dies. Two-hand controls used.

Presence-sensing devices (light curtains) and two-hand controls are the most common types of press brake safeguarding. A presence-sensing device prevents the machine from cycling when the sensing field is obstructed prior to cycle initiation and stops the downstroke when the sensing field is obstructed after cycle initiation. Two-hand controls (palm buttons) are designed to keep the operator’s hands from the die area by requiring concurrent and constant pressure to cycle the machine. Both presence-sensing devices and two-hand controls must be located at a proper “safety distance” — the distance from the pinch point hazard so that hazardous motion is stopped or prevented before the operator can enter the point of operation. **NOTE:** *When using presence-sensing devices, make sure there is no space between the device and the point of operation where an operator can stand undetected. If this is possible while maintaining an adequate safety distance, additional protection is required such as a second light curtain installed horizontally, a pressure-sensitive mat, or a physical barrier preventing access.*

Pullbacks and restraints offer another safeguarding option; these use cables/straps and wristlets to keep the operator’s hands out of the die area by either “pulling back” the arms and hands during the downstroke or simply “restraining” or keeping the operator’s arms and hands from entering the die area. Hand-feeding tools are often necessary when using restraints due to the limited range of movement.

NOTE: *Please refer to the **Power press** document (page 39) for more information on the above safeguards.*

If the use of physical barriers or devices is infeasible, safeguarding by “safe distance” is permitted if the employer meets the conditions described in Oregon OSHA Program Directive #A-217 “Guidelines for Point of Operation Guarding of Power Press Brakes.” This “Safe Distance Safeguarding” program is limited to one-time-only fabrication of made-to-order or custom-made piece parts, such as small-quantity runs typically performed in “job shop” establishments. A “small-quantity run” means fabrication of more than one of the same piece part over a continuous timeframe of no more than four hours per month.

Power press brake — continued

Under this instruction, the operator and helpers must not approach closer than necessary and in no case, closer than four inches to the brake's point of operation. The minimum safe distance of four inches must be measured from the exterior point of contact of the brake's die closest to the worker's fingers holding and supporting a piece part. Finally, this "Safe Distance Safeguarding" program must contain written exposure prevention procedures, training, and enforcement criteria. Please refer to Program Directive #A-217 for specific guidelines.

If more than one person is needed to operate, only one should be designated as the operator and controls should be furnished for each person. The operator should always make certain that any helpers are clear of the press before beginning the operation.

To avoid being pinched or struck by the work piece "whipping" up, never hold the material over the top of a previous bend, keep your hands underneath the work piece, and always keep your face and upper body out of the material's path.

Before any tooling can be installed, the ram should be locked in the shut height position, with the ram in its most extended position (on the up-stroke). Once the press is locked into that position, the tooling can slide safely into the press. The gap between the ram and the bed should be just big enough to allow easy installation without the tooling falling out. Use safety blocks where tooling permits. Make sure the back gauge is high enough to prevent the piece part from slipping over the top of it, which can bring the operator's hands and arms into the die.

To prevent accidental cycling, effectively cover all hand and foot controls. →

As with any power press, a "no hands in die" policy should always be encouraged. Of course, there are times during setup where this exposure will occur and effective die setting procedures or energy-control procedures will address this. Furthermore, the safeguarding devices and strategies mentioned here should keep the operator hands and other body parts out of the die area during operation. Never reach between the tooling for any reason — reach around or walk behind the press brake when necessary. Barricade the back of the press to restrict access.

NOTE: Consider feasible safeguarding or proper material holding techniques if operating a press brake within a stationary ram and a sliding bed.



QMF Solutions

Qualified and attentive operators are a must in maintaining safe press brake operations.



Rockford Systems Inc.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 — General Requirements for All Machines

Oregon OSHA Division 2/Subdivision J 29 CFR 1910.147 — The Control of Hazardous Energy (Lockout/Tagout)

- Oregon OSHA Program Directive A-217 “*Guidelines for Point of Operation Guarding of Power Press Brakes*” (November 17, 2006)

- OSHA Instruction CPL 02-01-025 “*Guidelines for Point of Operation Guarding of Power Press Brakes*” (February, 14 1997)

- ANSI B11.3 *Power Press Brakes — Safety Requirements for Construction, Care, and Use*

- ANSI B11.19 *Safeguarding When Referenced by the Other B11 Machine Tool Safety Standards — Performance Criteria for the Design, Consturction, Care, and Operation*


Power roll forming and bending machine

Conventional metal forming and bending machines, also known as plate bending rolls, produce smooth, circular bends in sheet, strip, or coiled stock. Metal is fed between successive pairs of rolls that progressively bend and form it until the desired shape and cross section is obtained. The radius of the bend can be adjusted by changing the location of the rolls. These machines are normally equipped with instant start, stop, and reverse controls.

Hazard

Severe crushing injuries, amputations, and even death can occur if a worker is caught and drawn into the counter-rotating infeed rolls. The risk of injury is high during the initial feeding of the stock. Wearing gloves with fingertips and loose clothing also increase the risk of entanglement.

Workers can also be struck by the moving work piece or pinned between it and a fixed structure.

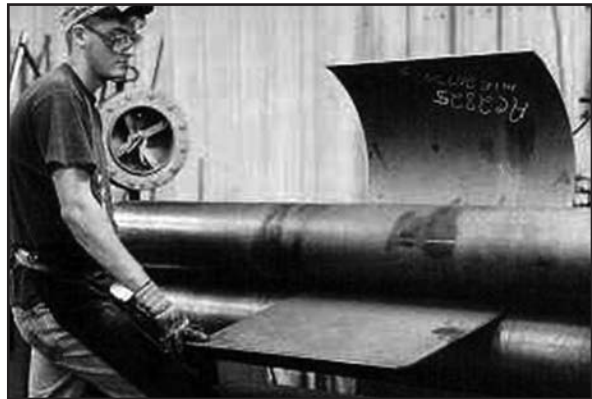

Imagine what this machine can do to arms and hands if it can bend metal like this.

Solution

Installing fixed or adjustable barrier guarding at the point of operation is usually not practical, primarily due to the flexibility needed to bend various sizes of stock. Some protection for the operator and anyone near the machine can be provided by using devices such as safety trip cables (emergency stop) and hold-down controls; however, these safety devices do not directly prevent entanglement or entrapment. They are intended to help prevent or minimize injury by stopping the machine quickly.

Hold-down button or foot controls are designed to actuate roll movement only when held in the run position. The control should automatically return to the stop position when released.

A trip device (bar, tensioned wire/cable, or kick panel) is interlocked with the machine's control circuit and positioned so that it may be easily actuated by any person caught or drawn toward the rolls and will stop the machine before serious injury can occur. It should run the entire length of the machine at the front and in the back. Also, ensure the braking system is adequate, as the safety devices are only effective if the dangerous parts of the machine stop quickly.

In addition to the measures detailed above, an emergency stop button should be provided at the machine control console and at any remote work station. If more than one person is needed to operate the machine, controls should be furnished for each person.



Gulfstream Steel & Supply

Safety trip cable running the entire length on this roll bending machine.

Stock should be held sufficiently far back from the edge being fed to prevent close proximity to the point of operation. Whenever practical, use feed or roller tables.

Consider wearing gloves without fingertips or palm protection only. Prohibit loose-fitting clothing.

Maintain adequate distance from the work piece being formed to prevent being struck by it.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.212 — General Requirements for All Machines

Oregon OSHA Division 2/Subdivision J 29 CFR 1910.147 — The Control of Hazardous Energy (Lockout/Tagout)

■ ANSI B11.12 *Safety Requirements for Roll Forming & Roll Bending Machines*

Radial-arm saw

Radial-arm saws are circular saws that are normally used to cut against the grain of wood (crosscut) but can also cut with the grain (rip). For crosscutting, the operator pushes the wood against a fence and pulls the saw into the cut. For rip cuts, the blade is set parallel to the fence, and the stock is pushed through.

Hazard

Severe cuts and amputations can occur if the operator contacts the rotating blade.

If the saw blade is able to go past the edge of the table, the blade can contact the operator's body.

Stock can be thrown back at the operator if unsecured, caught in the blade, or fed in the wrong direction.

Solution


Enclose the upper half of the saw (top of the blade to the arbor) with a fixed hood.

Guard the sides of the bottom half of the blade with a self-adjusting guard that automatically adjusts to the thickness of the stock and remains in contact with the stock throughout the cut. The lower guard must guard the full perimeter of the blade on both sides during the cutting cycle and in the rest position. It must guard all of the saw teeth. Oregon OSHA allows radial saws to be guarded by a device or devices (jigs, work holders, guides, or stops) that provide protection equal to that mentioned above.

Make sure the cutting head has a return device and an adjustable stop to prevent the leading edge of the saw from passing the front edge of the table, or extend the table edge.

Securely fasten material to avoid unwanted movement during cuts.

For ripping, install non-kickback fingers on both sides of the saw blade and use a spreader to prevent the cut in the wood from immediately closing and binding the blade.

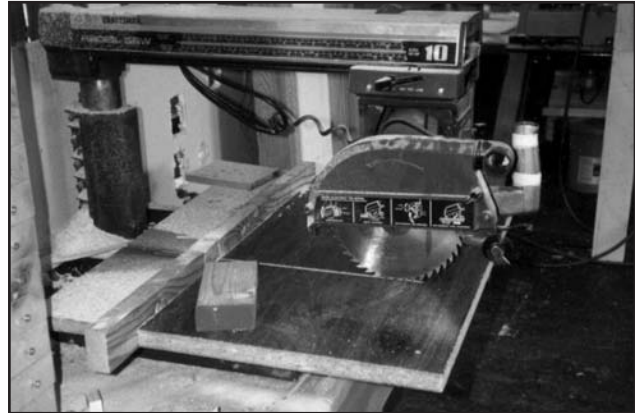

Bottom half of saw blade is unguarded.



Benson Polytechnic High School

References

- **General Industry** — *Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(h) and OAR 437-002-0242(4)*
- **Construction** — *Oregon OSHA Division 3/Subdivision I 29 CFR 1926.304(g)*
- **Agriculture** — *Oregon OSHA Division 4/Subdivision O OAR 437-004-2000(5)*
- Oregon OSHA Program Directive A-38 “Guarding: Radial Arm Saws” (March 8, 2001)
- ANSI 01.1 *Woodworking Machinery — Safety Requirements*

Sanders

Belt

Disk

Belt sander

The belt sander is a general-purpose finishing tool. The belt is looped around two or more pulleys and the linear motion makes it effective for sanding with the grain of wood. Abrasive belts of various grades also make the belt sander useful for shaping.

Belt sanders can be found in upright, vertical, and horizontal positions. When using a belt sander in an upright or vertical position, the work should be supported on a table.



Coffee Creek Correctional Facility

Hazard

Serious abrasion can occur from contacting the moving belt. Small work should not be abraded on the belt sander as the small piece can easily be dislodged from the operator's hands and allow contact with the belt.

Nip points are close to the point of operation and, if not guarded, can allow fingers, clothing, or hair to become caught in the machine. Nip points are created when the belt meets the pulley on all types of belt sanders and also if the distance between the work table and the downward portion of a vertical sanding belt is such that the operator can be pulled into it.

Solution

Guard the unused runs of the sanding belt.

Do not sand the face of pieces that are less than 3/4-inch thick unless you use a push shoe or some other means of supporting the stock.

Guard all nip points. This can normally be accomplished by enclosing the edge of the sanding belt and the ends of the pulleys. Also, ensure the work table is as close as possible to the sanding belt.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(p)(4)


■ ANSI 01.1 *Woodworking Machinery - Safety Requirements*



This vertical belt sander is equipped with guards on the sides to effectively cover the nip points created by the belt running onto the pulleys. Also, the work table is properly positioned close to the belt — minimizing the nip point created by the distance between the belt and table.

Disk sander

The disk sander provides rotary sanding. The table (rest) on a disk sander can be at a fixed, level position or adjusted to various angles. One-half of the top half of the vertical disk is used — the half that rotates toward the table.

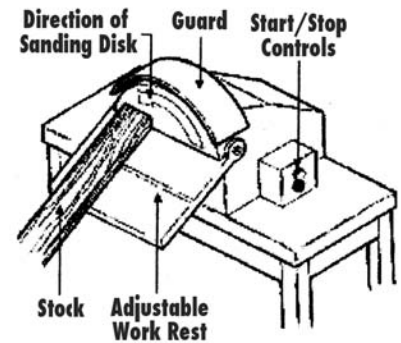

Hazard

Serious abrasions to the fingers and hands can occur if the operator contacts the abrasive sanding disk.

Stock can violently kick back if pressed against the portion of the sanding disk that is rotating away from the table (e.g., right side of the disk in the diagram above).


A nip point can be created if the distance between the table and the downward portion of the disk is such that the operator can be pulled into it.

Solution

Keep hands away from the abrasive surface and use only the downward side of the disk so that the wood is driven onto the table by the machine's rotation.

Do not sand pieces that are of a shape or size that can become wedged between the disk and the work table. Hold small or thin pieces of stock in a jig or holding device to prevent abrasion to the fingers or hands.

Each disk sanding machine must have an exhaust hood (or other guard if no exhaust system is installed) that encloses the rotating disk, except for the portion of the disk above the table. This also applies to drum (spindle) sanders.

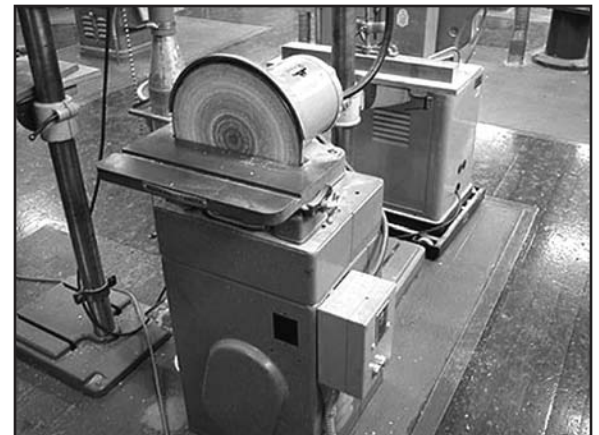

University of British Columbia

References

■ General Industry

Oregon OSHA Division 2/Subdivision O
29 CFR 1910.213(p)(3) — *Disk Sanders*
29 CFR 1910.213(p)(2) — *Drum Sanders*

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*

Disk sanders are also used for metal work. Provisions outlined above apply.



The Hobbyist's Machine Shop

Wood Dust

Hazards and precautions

Wood dust consists of tiny particles of wood produced during processing and handling of wood, chipboard, hardboard, etc. Sanding, shaping, routing, sawing, and using compressed air generally produce the greatest amount of dust.

Exposure to wood dust has long been associated with a variety of adverse health effects, including dermatitis and other allergic reactions, mucosal and nonallergic respiratory effects, and cancer. A hypersensitivity reaction leading to asthma, pneumonitis, and chronic bronchitis has been associated with exposure to wood dust, commonly from western red cedar, cedar of lebanon, oak, mahogany, and redwood. Dust from both hardwood and softwood has also been reported to cause cancer. The three types of cancers associated with wood dust exposure are nasal and sinus cavity cancer, lung cancers, and Hodgkin's disease.

Other common symptoms from wood dust include eye irritation, nasal dryness and obstruction, prolonged colds, and frequent headaches. Furthermore, health effects can come from biological organisms such as mold and fungi that grow on the wood, or from chemicals used in some wood processing, such as formaldehyde, copper naphthanate, and pentachlorophenol.

In addition to the health effects, airborne wood dust can create the potential for fire or explosion.

Airborne dust can be adequately controlled by using dust-minimizing equipment and tools in addition to dust control equipment such as local or central exhaust ventilation. Proper maintenance and housekeeping practices are also important. Keep ventilation ducts free from blockages and maintain ducts, filters, and other collection equipment in accordance with manufacturer's recommendations. Suitable respiratory protection must be worn if dust levels cannot be reduced to acceptable levels.

Check that the design and installation of dust-control equipment incorporates explosion precautions and control potential ignition sources like heaters, overheated electric motors, electric sparks and sparks from other sources such as open wood burning stoves and cigarettes.

Regulations

- Oregon OSHA Division 2/Subdivision Z OAR 437-002-0382 *Oregon Rules for Air Contaminants*
- Permissible Exposure Limit (PEL) = Wood Dust (non-allergenic) TWA 10mg/m³; Particulates not otherwise regulated: Total Dust TWA 10mg/m³, Respirable Fraction TWA 5mg/m³
- ACGIH Threshold Limit Value (TLV) = TWA 1 mg/m³ (certain hard woods such as beech and oak), TWA 5 mg/m³ (softwood); Short Term Exposure Limit (TLV-STEL) = 10 mg/m³ (softwood)
- NIOSH Recommended Exposure Limit (REL) = TWA 1 mg/m³

* TWA = Time Weighted Average

Scroll (jig) saw

Scroll saws are useful for cutting intricate curves and patterns in thin stock. They have thin blades that move rapidly up and down through the opening in the saw table. The blade is held in upper and lower chucks that pull it tight and keep it from bending. A hold-down device adjusts to the thickness of the wood being cut. The material is pushed through the moving blade.



Hazard

Serious cuts to the fingers and hand can occur if the operator contacts the blade.

The blade can bind or break if stock is lifted during the upstroke of the reciprocating blade or if the stock is moved aggressively.

Solution

Guard the blade above the work piece with an adjustable guard.

Use an adjustable holddown device to oppose the lifting tendency of the work piece from the reciprocating blade.

Make turns slowly. Use a narrow blade for sharp turns. Consider using aids to push material through the blade.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(r)(4)

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*



Safety guard/holddown installed.

Southwest Idaho JDC

Shaper/router

Woodworking shapers and routers are machines that cut various straight and irregularly shaped (contour) profiles such as tonguing and grooving, and decorative molding. Although there are slight differences in operation, both routers and shapers use one or more cutting heads mounted on a rotating, vertical spindle. Shaper spindles are normally mounted below the stock and router spindles are often mounted above the stock.

The primary difference in operation is how stock is fed into the cutter. Routers commonly cut either stationary or moving stock and shapers cut only moving stock. On manually-fed shapers, the operator feeds and manipulates the stock against the rotating cutter while keeping the stock flat on the table. Guides can be used for irregular cuts and fences are often used for straight line shaping.

Hazard

Amputations or severe lacerations can occur if the operator contacts the cutter head. Also, loose clothing or gloves can become entangled in the rotating cutter or spindle simply due to the operator's proximity to the cutting head.

Routers and shapers rotate at tremendous speeds — many operating in excess of 10,000 rpm. Any imbalance or vibration of the spindle and cutter presents a significant flying object hazard.

Hazardous kickbacks of the stock also can occur.




Exposed cutting head on shaper.

Solution

Ensure that the spindle is enclosed by the machine/work table or a guard. The table opening for shapers must provide support for the stock to within .25 inches of the largest diameter cutter (inserts must be provided for smaller diameter cutters).

All sections of the cutter must be safeguarded, except for the opening to allow stock. For straight-line shaping, a fence must be provided to limit the depth of the cut and enclose the non-working side of the cutter. The fence should contain as small an opening as possible for the cutter and extend on either side of the spindle. The fence or an additional guarding provision must also protect the operator from above the cutter by extending beyond the largest diameter cutting head.

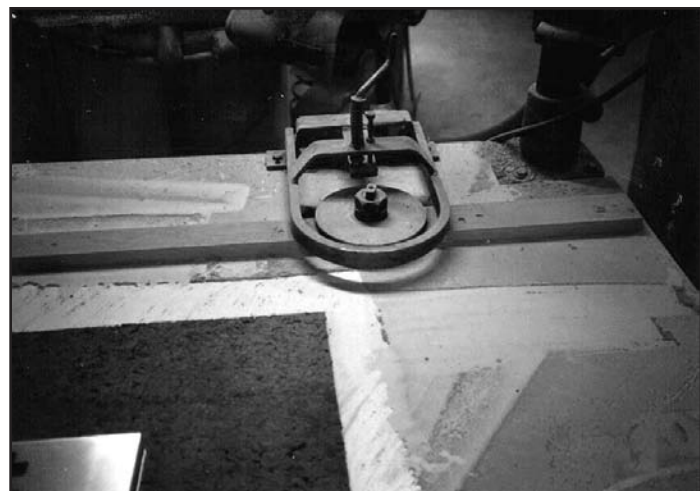


Fence and barrier-type guarding used for straight-line shaping.

For contour (free-hand) shaping, a “ring” guard or other type of adjustable guarding must be provided to protect the operator from the exposed cutter (see accompanying illustration). If properly set up, this guard may also hold down the work, minimizing kickback.

Use templates, jigs/fixtures, featherboards, or push blocks to distance the operator’s hands from the point of operation and to aid when shaping smaller dimensioned stock. Avoid wearing loose-fitting clothing or gloves.

To minimize hazardous kickback, use extra care when shaping stock that contains cross grains or knots. Use a secure stop block where an interrupted cut is made. Do not back up the stock (check to see that the direction of rotation is as expected).

Ensure the cutting head is stable and does not vibrate excessively when operated at maximum recommended speeds.

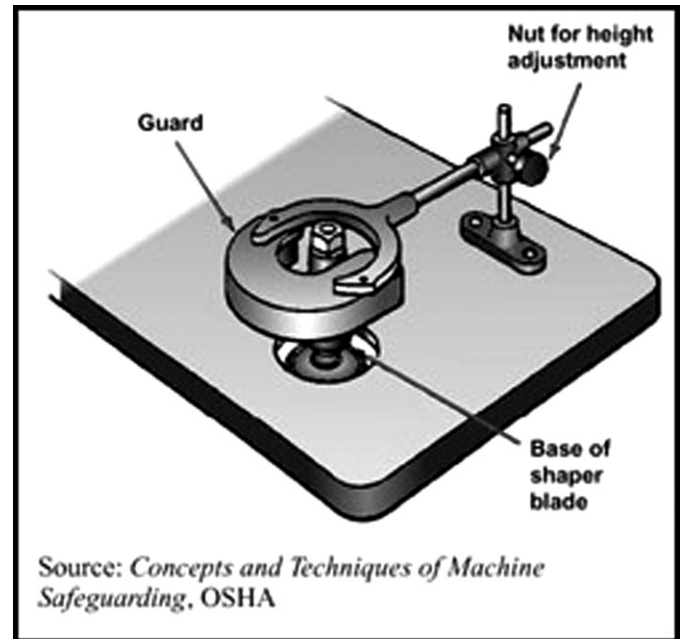

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(m)(1)

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*

Shear

Power squaring shears and plate shears cut sheets of metal using either mechanical or hydraulic-driven rams for the shearing action. The ram moves a non-rotary blade at a constant rate past the edge of a fixed blade.

The operator feeds or places the stock between the blades, ensures it is properly positioned, and activates the cutting cycle with either foot or hand controls. The material hold-down devices, exerting a tremendous amount of force, clamp the stock immediately prior to the shearing action.

Two other types of shears are also used in industry: alligator and guillotine shears. Both of these types are used to cut metal stock and scrap metal. Guillotine shears also are used for paper and plastic.



Georgia Tech Research Institute

Hazard

Like all machines that have operating cycles, shears present the possibility of placing a hand in the danger zone. And in the case of a shear, the consequences are severe.

The primary hazard of the point of operation is the shear hazard. Since shears use blades to sever many forms and various sizes of stock, there is no doubt what can happen to hands or fingers.

The hold-down devices on power squaring shears also create a very serious pinch point, which can lead to amputation or fractures to the hands or fingers.

Serious lacerations can also occur from handling the blades.




Gensco Equipment

Properly guarded alligator shear.

Solution

The shear blades are normally safeguarded by the equipment manufacturer's barrier guard. If not, a barrier guard, capable of adjusting to the thickness of the stock, must be installed in front of the shear blades. *The jagged-edge barrier guard behind the hold-down devices in the picture (right) is the shear blade guard.*

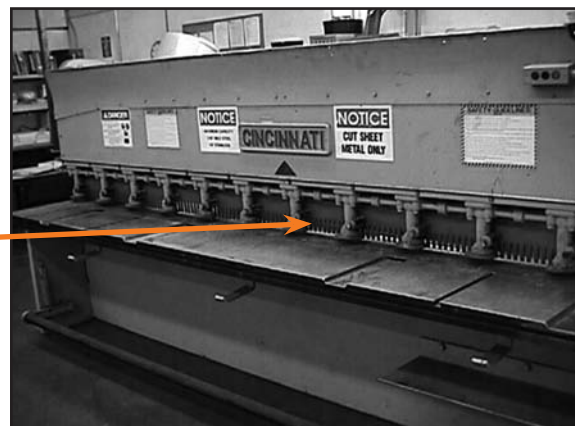


Unguarded hold-down devices on a power squaring shear.

An adjustable barrier guard must also be provided in front of the hold-down devices to protect the operator from the pinch point hazard.

These guards must meet the safe opening requirements found on page 41. They must be adjustable so that operators can feed the stock but cannot get their hands or fingers into the hazard area.



Adjustable barrier-type guarding for the hold-down devices must accommodate stock, not fingers.

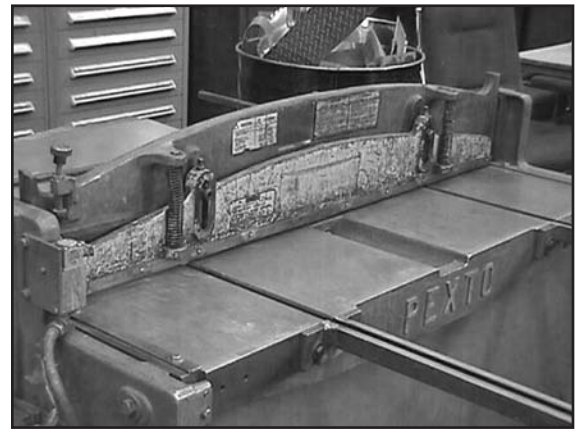


Adjustable barrier-type guard. Georgia-Pacific (Wauna Mill)

On mechanical shears equipped with a part-revolution clutch or for those that are hydraulically powered, light curtain presence-sensing devices or two-hand control devices can also be considered to be safeguarding options.

Wear gloves when handling the stock. In addition to gloves, appropriate mechanical devices or assistance should be used when removing, handling, and installing the blades.

Hand/foot controls should be enclosed or shrouded to eliminate accidental cycling.

The back of the shear, where sheared debris drops, should be barricaded.

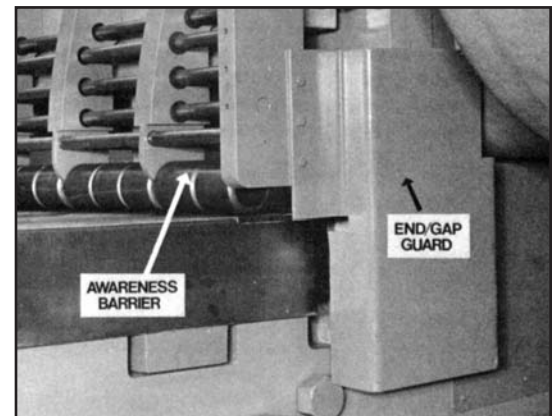

Cincinnati Inc.


If the C-frame throat is open on either side of a power squaring shear, the gap must be guarded.

References

■ General Industry

*Oregon OSHA Division 2/Subdivision O
29 CFR 1910.212 — General Requirements
for All Machines*

- ANSI B11.4 *Shears — Safety Requirements for Construction, Care, and Use.*

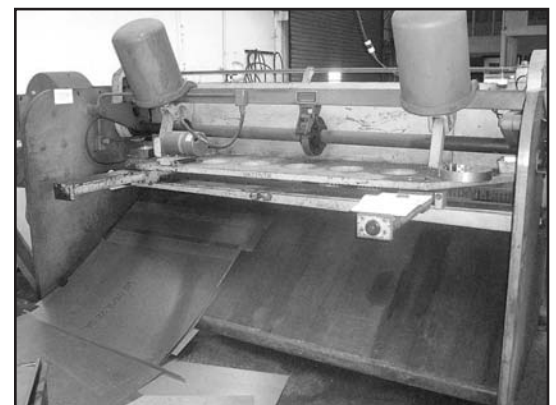

Barricade or restrict the area behind the shear.

Table saw

Table saws are versatile saws used for cutting across (crosscut) and with (rip) the wood grain. They are most commonly used to rip.

After adjusting the height and angle of the blade, the operator pushes the stock into the blade to make the cut. A guide (fence) is used to maintain a straight cut parallel to the blade.

Hazard

Severe cuts and amputations to the fingers or hands can occur if the operator contacts the saw blade. Many serious injuries are the result of using the table saw without the point-of-operation guarding. These injuries are often a direct result of operating the unguarded machine in combination with other hazardous practices, such as placing hands very close to the blade to guide stock (e.g., not using a push stick to guide stock through a cut), not firmly holding the stock causing the hands to slip off, diverting attention away from the cut (e.g., focusing on a long-sleeve shirt cuff in the middle of the cut), or removing small scraps (tailings) or finished pieces of stock from around the blade.

Although not at the point of operation, contact with the saw blade (and often a belt drive) may also be made from behind and underneath the table saw.

Kickbacks also offer a significant hazard and occur when the blade catches the stock and throws it back toward the operator. Kickbacks, more likely to occur during ripping, can result if the blade height is not correct, if the blade is not maintained properly, or safeguards are not used. In addition, kickbacks can also occur if the operator stops guiding the stock during the cut. For example, material remaining on the table behind the saw can cause an obstruction with the stock and require the operator to stop mid-cut.



DEWALT Industrial Tool Co.



Table saw equipped with self-adjusting blade guard.

Solution

The most common blade guard is a self-adjusting guard that encloses the portion of the saw above the table, and above the stock being cut. The guard automatically adjusts to the thickness of the material being cut and remains in contact with it during the cut.

Fixed enclosures, fixed barrier guards, or manually adjusted guards (e.g., Brett-Guards) can also be used as point of operation guarding provided its protection is equivalent to the protection of self-adjusting guards and it prevents employee exposure to the saw blade. These guards must be used under sufficient supervision and in accordance with manufacturer's instructions.


Prevent exposure to the blade (and belt drive) located underneath and behind the table saw with a fixed guard.

Use a push stick for small pieces of wood and for pushing stock past the blade. Consider using large or well-designed push sticks that can not only provide a firm and stable grip of the stock but also effectively push the stock through while keeping your hand away from the blade. Combs (featherboards) or suitable jigs can be used when a standard guard cannot be used during dadoing, grooving, jointing, moulding, or rabbeting.


Turn the power off, wait for the blade to stop, and lower the blade before removing scraps or finished pieces of stock from around the blade.

Use a spreader and anti-kickback fingers to prevent material from squeezing the saw or kicking back during ripping.

Ensure enough clearance behind the blade to allow the stock to completely pass through the cut. Also, provide support for material that will pass beyond the table.

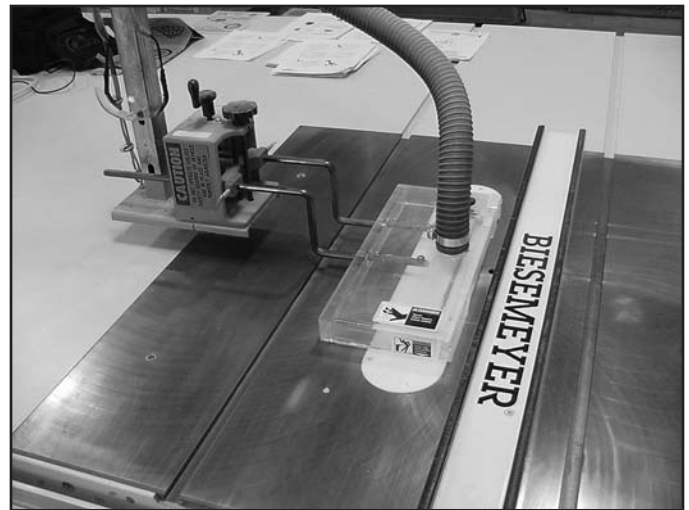

Coffee Creek Correctional Facility
Manually adjustable "Brett-Guard."

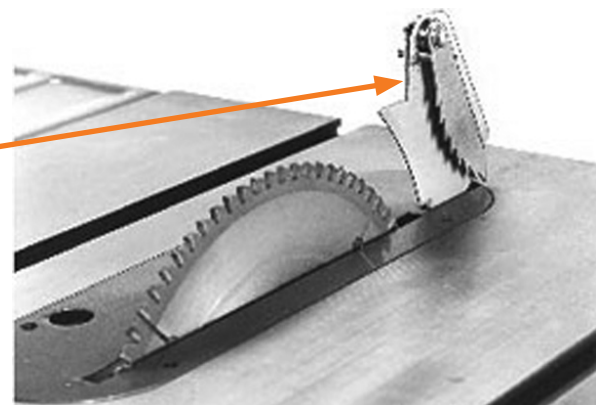

Biesemeyer Products/Delta Machinery
Guard removed to show spreader device.

References

■ General Industry

Oregon OSHA Division 2/Subdivision O 29 CFR 1910.213(c) & (d)

■ Construction

Oregon OSHA Division 3/Subdivision I 29 CFR 1926.304(h) & (i)

■ Agriculture

Oregon OSHA Division 4/Subdivision O OAR 437-004-2000(6)

■ Oregon OSHA Program Directive A-107 "Guarding: Woodworking Machinery" (March 13, 2001)

■ ANSI 01.1 *Woodworking Machinery — Safety Requirements*

Guarding power-transmission apparatuses


Power-transmission apparatuses include all components of the mechanical system that transmits energy to machines and equipment. Flywheels, couplings, pulleys, belts, cams, cranks, spindles, shafts, gears, chains, and sprockets are common examples of these components.

Since these parts move in order to transmit energy, they provide a variety of hazards to operators and other nearby workers. The most common hazard is the rotating motion from these components. Entanglement can occur from a single part (e.g., shaft) or parts rotating closely together, producing “in-running nip points.” In-running nip points are caused when parts rotate against a fixed object (e.g., screw conveyor), parts rotate in the same direction (e.g., v-belt and pulley), or when their axes are parallel but rotate in opposite direction (e.g., gears).

It is usually not difficult to guard these components. As a general rule, a power-transmission apparatus is best protected by fixed barrier guards that enclose the danger. Specific guarding requirements are found in Oregon OSHA Division 2/Subdivision O 29 CFR 1910.219 — Mechanical Power Transmission Apparatus.


Power transmission components may also be guarded by location or distance. Basically, this means that all moving parts are positioned so that the hazardous areas are not accessible or do not present a hazard during normal operation; examples include positioning them above workers or behind a wall, barrier, or fence. However, the following questions should be asked before considering this strategy:

- Can components be easily accessed?
- Can pieces or parts break and fall?
- Are sparks or other flying debris being produced?

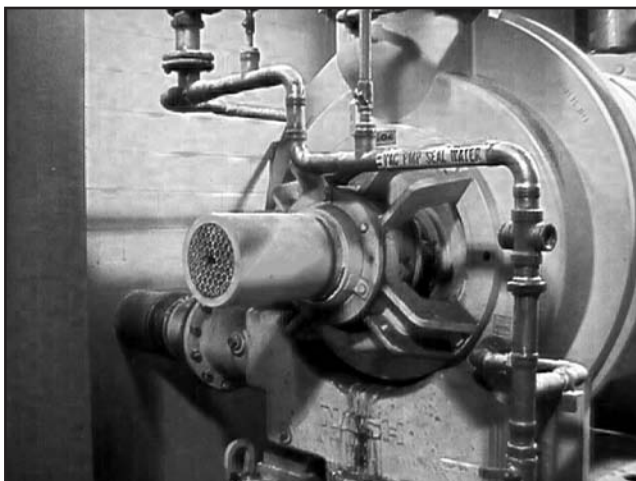

Fixed guard covering a shaft end.

Georgia-Pacific Wauna Mill

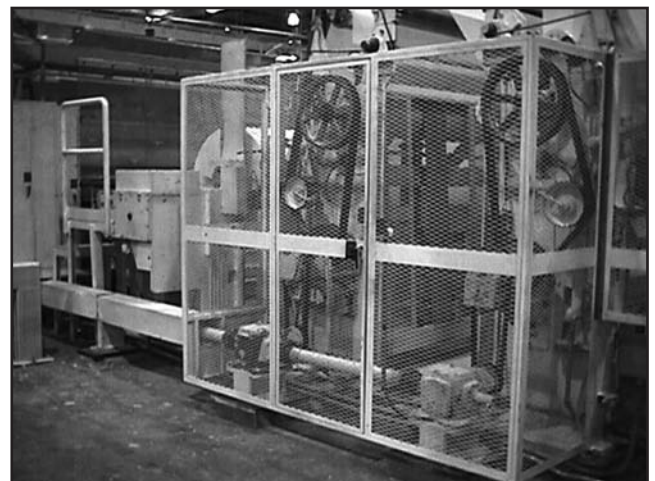

Fixed guard enclosing several belt drives.

Georgia Pacific Wauna Mill


Lockout/Tagout

Safe work practices during service and repair

Many serious injuries and fatalities occur when somebody thinks a machine is safely isolated from its energy sources or stored energy has been relieved or blocked. Approximately 120 workers are killed in the U.S. every year from a failure to isolate hazardous energy effectively.

Oregon OSHA's Hazardous Energy Control standard, routinely referred to as "lockout/tagout," covers the maintenance of machinery and equipment where unexpected startup, movement, or the release of stored energy can cause injury to workers. In general, the standard requires that all energy sources for machinery and equipment be turned off, isolated (disconnected), and physically locked out. Bleeding, relieving, or blocking other stored and residual energy must also be done to ensure isolation. The final important step before service begins is to verify all energy has been de-energized and isolated. These procedures, along with training and periodic audits, must be established and enforced.

Minor tool changes and adjustments, and other minor servicing activities, which take place during normal production operations, are not covered by this standard if they are routine, repetitive, and integral to the use of the equipment for production, provided that the work is performed using alternative measures that provide effective protection. Selection of an alternate control method must be based on a risk assessment of the machine, equipment, or process. The risk assessment must consider existing safeguards provided with the machine, equipment, or process that may need to be removed or modified to perform a given task. For example, when control circuits are used as part of the safeguarding system, the system must be designed to ensure protection as effective as a mechanical disconnect switch or master shutoff valve. A control-reliable dual-channel hardwired circuit of industrially rated components that satisfies the design features as specified in ANSI B11.19, with a safety relay or safety PLC (programmable logic controllers) to ensure integrity and performance of the safeguarding system, must be used. Under all circumstances, the individual must have exclusive personal control over the means to maintain the state of the control circuit in a protective mode.

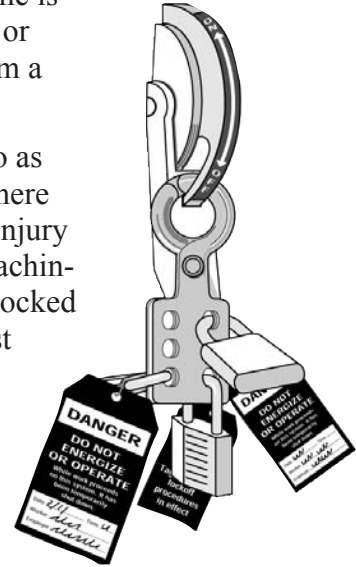

References

■ General Industry

*Oregon OSHA Division 2/Subdivision J 29 CFR 1910.147
The Control of Hazardous Energy (Lockout/Tagout)*

- Oregon OSHA Program Directive A-156 "Control of Hazardous Energy – Enforcement Policy and Inspection Procedures" (Lockout/Tagout)" (August 08, 2008)
- Oregon OSHA Publication Number 3326 "Guide to Controlling Hazardous Energy"
- ANSI/ASSE Z244.1 *Control of Hazardous Energy (Lockout/Tagout and Alternative Methods)*
- ANSI B11.19 *Safeguarding When Referenced by the Other B11 Machine Tool Safety Standards — Performance Criteria for the Design, Construction, Care, and Operation*

Risk-Reduction Hierarchy

A hierarchical approach is recommended when first approaching the safeguarding of a machine or operation:

1. Eliminate the hazard or exposure to the hazard

- design/redesign the operation to remove exposure (e.g., automatic feeding/ejection)
- locate the hazard where it is not accessible due to its location or distance
- reduce energy
- implement machine control techniques/systems (e.g., monitoring, redundancy, reliability)

2. Install fixed guarding

- interlocked or fastened barrier guarding to prevent intentional or unintentional exposure, not removable or adjustable by unauthorized persons (e.g., metal or plastic enclosures, fixed screens, adjustable guarding, self-adjustable guarding)

3. Install safeguarding

- devices that require adjustment and/or actuation by the operator (e.g., presence-sensing devices, gates, two-hand controls, pullback, restraints)

4. Use administrative controls and aids to supplement engineering controls

- reduce the occurrence of the task
- information (e.g., manuals) and warnings (e.g., signs, lights, alarms, awareness barriers)
- hands-on training (qualification) and safe work practices (e.g., job hazard analyses)

Training guidelines

An important step in machine safeguarding — a step which is often overlooked — is providing safety instruction and training on the various types of equipment the worker is expected to operate and the safeguarding the worker is expected to use.

At a minimum, this education should include:

Discussion of hazardous exposures and control measures

- Hazardous motions (rotating, reciprocating, transverse)
- Hazardous actions (cutting, bending, drilling, punching, etc.)
- Potential of flying or ejected material or parts
- Effective safeguarding methods or other control measures (automatic/semi automatic feeding/ejection, guarding by location/distance, etc.)
- Ergonomics (awkward posture, vibration, repetitive motion, forceful exertion, etc.)
- Fire or combustion hazards (dust, lubricants, hot processes, hydraulic fluid, etc.)
- Appropriate personal protective equipment and clothing
- Health hazards
 - air quality (dust, fumes or smoke from certain metals, mist from fluids, etc.)
 - noise and vibration
 - metalworking fluids (danger to skin, lungs, etc.)

Equipment-specific training (hands-on)

- Proper operation of safeguards
- Limitations
- Maintenance and care
- Inspection
- Adjustment and placement
- Clarification of manufacturer requirements
- Procedures to follow when safeguard is discovered damaged, missing, etc.

Training and relevant retraining must be provided for new operators and maintenance/setup employees. Also, retrain affected employees when new or altered safeguards are used, when an employee is assigned to a new machine or operation, and whenever worker deficiencies are discovered.

Furthermore, safeguarding strategies must include adequate management controls, such as accountability, enforcement, inspection, and maintenance. This can ensure clean and roomy work areas, properly maintained safeguards, and that lockout/tagout procedures are followed, to name a few. Finally, don't forget personal disabilities (e.g., color blindness, hearing impairment) if relying on visual warnings (colors) or audible warnings (machine startup).



Nova Scotia Agricultural College

Basic safety principles

Although this guide addresses point-of-operation safeguarding for specific machinery, it is also important to establish and enforce safe work practices when operating and maintaining all types of equipment and machinery.

The following list includes basic rules that apply to portable and fixed machinery:

Equipment (“parts” include blades, bits, sanding belts, dies, grinding stones)

- Follow the equipment manufacturer’s recommendations
- Use equipment only for the purpose for which its design is intended
- Operate the tool at the speed and tension specified by the manufacturer
- Inspect the equipment visually before use
- Remove unadjusted, defective, cracked, or worn parts from service
- Maintain sharp and clean parts
- When provided, use equipment with an exhaust or dust-collection system
- Use the appropriate size and type of part for the material and cutting action
- Check to see that guards, guides, and counterweights are properly adjusted and operable
- Avoid overheating the equipment

Work practices

- Use only tools you can control easily
- Make sure hands are kept at a safe distance
- Follow safe procedures as outlined in the operator’s manual
- Always wear eye and face protection and other appropriate personal protective equipment
- Do not wear loose clothing or long hair
- Check to see that power cords are kept away from the line of cut and other moving parts
- Follow proper lockout/tagout procedures during service and repair
- Never defeat the guard to expose the blade
- Never reach under the saw, work piece, or any place you can’t see clearly
- Direct the operation away from your body

Work environment

- Practice good housekeeping — avoid crowded, cluttered conditions
- Make sure combustible or flammable material is located away from spark-producing operations
- Provide adequate ventilation to reduce dust and other air contaminants
- Monitor noise levels and provide hearing protection when necessary

Glossary of selected terms

Adjustable barrier guard — A physical barrier requiring manual adjustment for various jobs.

Brake monitor — A sensor designed, constructed, and arranged to monitor the effectiveness of the press braking system.

Control reliability (also called performance of safety-related functions) — a part of the system that controls hazardous motion of a machine. It ensures the machine will stop when required in the event of a single component failure within the system.

Device — A control or attachment that:

- Prevents a cycle if the operator's hands are inadvertently in the point of operation
- Maintains the operator's hands at a safe distance during the hazardous portion of a cycle
- Restrains the operator from inadvertently reaching into the point of operation
- Automatically withdraws the operator's hands from the point of operation as the dies close

Fixed (barrier) guard — A guard that provides a physical restriction to a hazard.

Guard — A physical barrier that prevents entry of the operator's hands or fingers into the point of operation. **A guard:**

- Must prevent any contact to the machine hazard and installed to prevent contact from around, over, through, or under the guard
- Must not allow objects to fall into moving parts or be ejected toward a worker
- Must not create a pinch point between it and moving machine parts
- Must be affixed to the machine and remain secure
- Must facilitate its own inspection and allow for maintenance and lubrication
- Must offer maximum visibility of the point of operation consistent with the other requirements
- Must conform to other appropriate standards (ANSI, manufacturer specifications, etc.)

Interlocked guard — A barrier that, when opened or removed, trips a control mechanism that stops a cycle or prevents a cycle until the guard returns to its safe position.

Point of operation — The area on a machine where work is actually performed upon the material being processed.

Safety distance — A calculation of how far a person's hand can move from the time it activates a device until the slide stops moving.

Self-adjusting guard — A physical barrier that adjusts by the movement of stock and returns to its rest position after the stock passes through.

Oregon OSHA Services

Oregon OSHA offers a wide variety of safety and health services to employers and employees:

Appeals

503-947-7426; 800-922-2689; admin.web@state.or.us

- Provides the opportunity for employers to hold informal meetings with Oregon OSHA on concerns about workplace safety and health.
- Discusses Oregon OSHA's requirements and clarifies workplace safety or health violations.
- Discusses abatement dates and negotiates settlement agreements to resolve disputed citations.

Conferences

503-378-3272; 888-292-5247, Option 1; oregon.conferences@state.or.us

- Co-hosts conferences throughout Oregon that enable employees and employers to learn and share ideas with local and nationally recognized safety and health professionals.

Consultative Services

503-378-3272; 800-922-2689; consult.web@state.or.us

- Offers no-cost, on-site safety and health assistance to help Oregon employers recognize and correct workplace safety and health problems.
- Provides consultations in the areas of safety, industrial hygiene, ergonomics, occupational safety and health programs, assistance to new businesses, the Safety and Health Achievement Recognition Program (SHARP), and the Voluntary Protection Program (VPP).

Enforcement

503-378-3272; 800-922-2689; enforce.web@state.or.us

- Offers pre-job conferences for mobile employers in industries such as logging and construction.
- Inspects places of employment for occupational safety and health hazards and investigates workplace complaints and accidents.
- Provides abatement assistance to employers who have received citations and provides compliance and technical assistance by phone.
- Public Education 503-947-7443; 888-292-5247, Option 2; ed.web@state.or.us
- Provides workshops and materials covering management of basic safety and health programs, safety committees, accident investigation, technical topics, and job safety analysis.

Standards and Technical Resources

503-378-3272; 800-922-2689; tech.web@state.or.us

- Develops, interprets, and gives technical advice on Oregon OSHA's safety and health rules.
- Publishes safe-practices guides, pamphlets, and other materials for employers and employees
- Manages the Oregon OSHA Resource Center, which offers safety videos, books, periodicals, and research assistance for employers and employees.

**Need more information?
Call your nearest Oregon OSHA office.**

Salem Central Office

350 Winter St. NE, Rm. 430
Salem, OR 97301-3882

Phone: 503-378-3272

Toll-free: 800-922-2689

Fax: 503-947-7461

en Español: 800-843-8086

Web site: www.orosha.org

Bend

Red Oaks Square
1230 NE Third St., Ste. A-115
Bend, OR 97701-4374
541-388-6066

Consultation: 541-388-6068

Eugene

1140 Willagillespie, Ste. 42
Eugene, OR 97401-2101
541-686-7562

Consultation: 541-686-7913

Medford

1840 Barnett Road, Ste. D
Medford, OR 97504-8250
541-776-6030

Consultation: 541-776-6016

Pendleton

200 SE Hailey Ave.
Pendleton, OR 97801-3056
541-276-9175

Consultation: 541-276-2353

Portland

1750 NW Naito Parkway, Ste. 112
Portland, OR 97209-2533
503-229-5910

Consultation: 503-229-6193

Salem

1340 Tandem Ave. NE, Ste. 160
Salem, OR 97303
503-378-3274

Consultation: 503-373-7819

